


Experts in **Rubber** 

## Rubber P Extrusion 65mm x 25mm

Product Code: RC01107 Reference: RC6525L

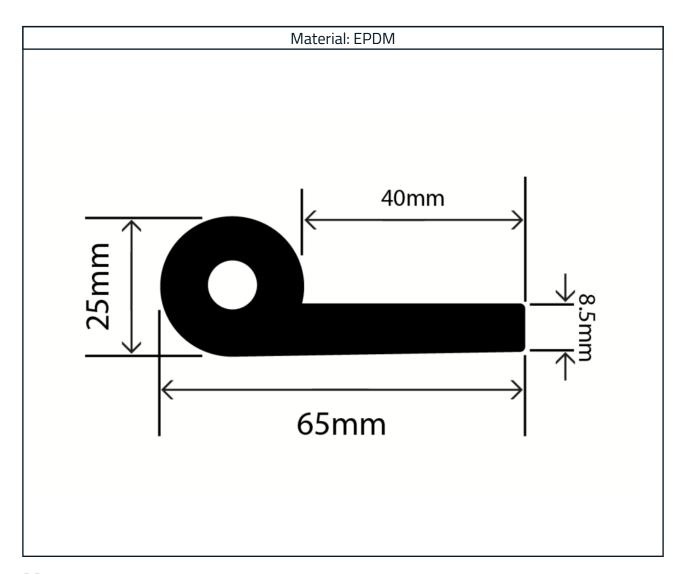

## Measurements:



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.





 $\textit{Manufacturers} \cdot \textit{Designers} \cdot \textit{Distributors}$ 

## **Technical Data**

Specification	Value
Initial Properties	
Hardness (Shore A)	70°
Density (Specific Gravity)	1.26 g/cm³
Tensile Strength	9.0 Mpa
Elongation at Break	275%
Compression Set (22hrs @ 70°C)	22.5%
Heat Resistance (70hrs @ 70°C)	
Change in Shore Hardness	+5°
Change in Tensile Strength	+/- 10%
Change in Elongation at Break	+/- 15%
Resistance	
Ozone & Weathering Resistance	Fair
Dilute Acid & Bases	Fair



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.