


Experts in **Rubber**

TPE Rubber Angle Profile RC4352

Material: TPE

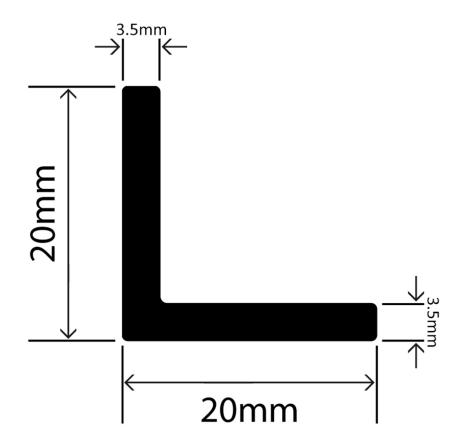

Measurements:

Height	Width
20mm	20mm

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.



Experts in **Rubber**

Technical Data Material Specification

Property	Test Method	Value
Polymer	-	Thermoplastic Elastomer (SEBS)
Hardness (Shore A)	ASTM D2240	67°
Tensile Strength	ASTM D792	7.0 MPa
Elongation at Break	ASTM D412	750%
Compression Set (22 Hours at 23°C)	ASTM D395	15%
Compression Set (22 Hours at 70°C)	ASTM D395	29%
Compression Set (22 Hours at 100°C)	ASTM D395	54%
Reflexometric Fogging (3 Hours at 100°C)	DIN 75201 A	96%
Gravimetric Fogging (3 Hours at 100°C)	DIN 75201 B	10.65 MG
Operating Temperature Range	-	-40°C to +90°C



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.