


TICO S/PA® Anti-Vibration Material Datasheet

Product Code: RC1105-SPA

Product Description

TICO S/PA® anti-vibration material combines excellent noise and vibration absorption in a highly durable and resistant format. This high-performance material is ideal for applications that require an easy-to-cut and simple-to-install solution.

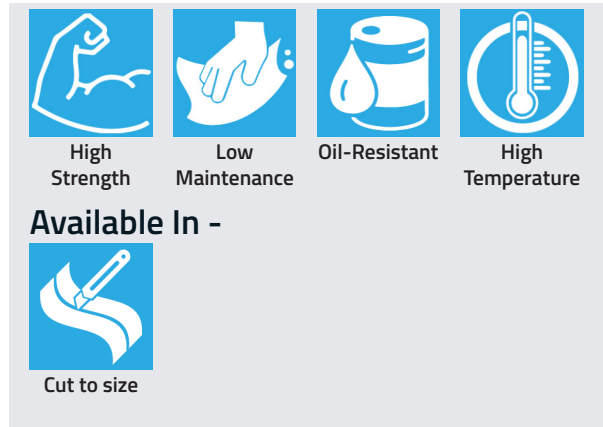

Material Properties

Properties	Value
Material:	Cork particles and Polychloroprene/Acrylonite elastomers
Hardness (Shore A):	69 ± 5 °
Colour:	Reddish-Brown
Maximum Load Bearing Capacity:	0.5 MN/m ²
Tensile Strength:	2.1 MN/m ²
Elongation at Break:	50 to 80%
Thermal Conductivity:	0.101 W/m °C
Coefficient of Friction:	0.65 (to concrete), 0.5 (to bright mild steel)
Operating Temperature Range:	-40°C to +100°C



ISO
9001 : 2015
REGISTERED

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.



Manufacturers · Designers · Distributors

Experts in
Rubber

Standard Dimensions

Properties	Value
Thicknesses:	6.0mm, 9.5mm, 12.5mm, 19.0mm, 25.0mm
Widths:	50mm, 75mm, 100mm, 125mm, 150mm, 300mm, 600m, 1200mm
Lengths:	1200mm



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E sales@therubbercompany.com • W www.therubbercompany.com • T +44 (0) 1794 513 184

The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80

REV 0.1
07/23