


RubbaClean-T Plus Entrance Matting System Datasheet

Product Code: R-CLEAN-CR-PLUS-T

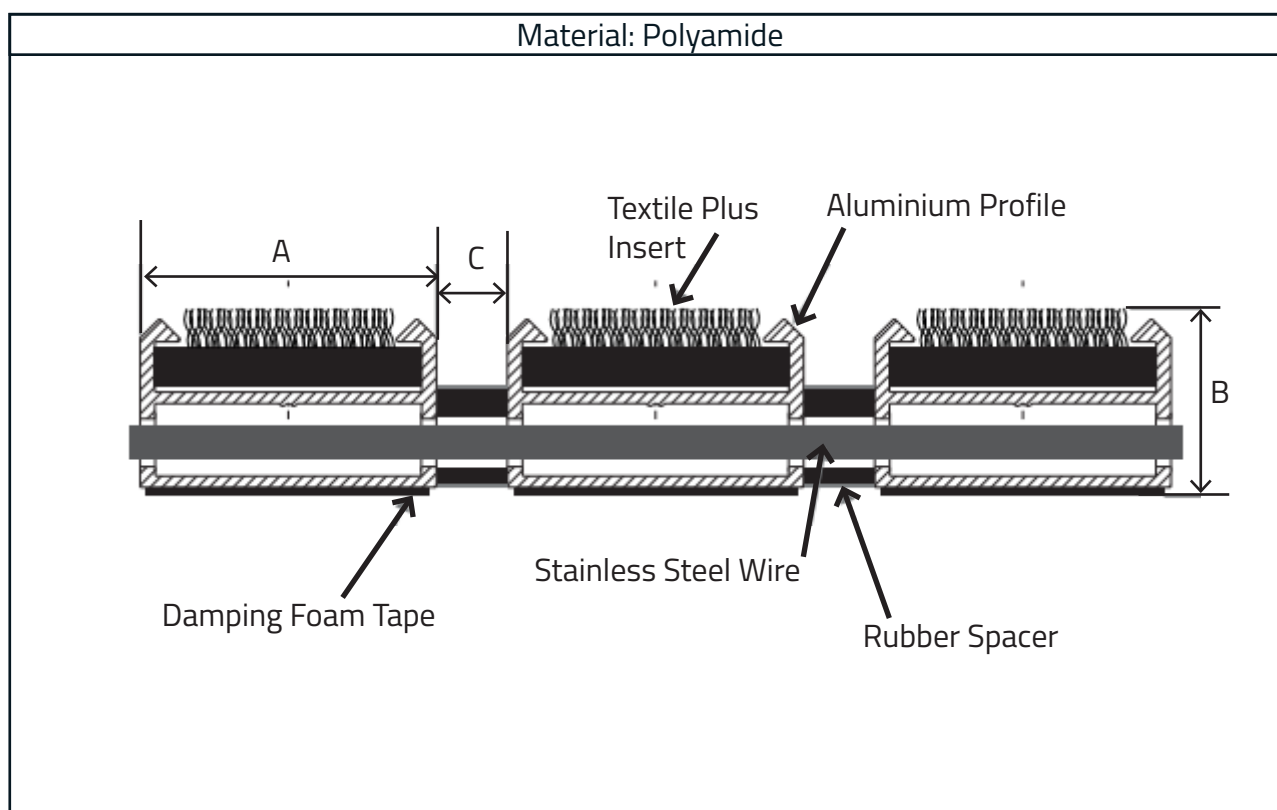

Measurements:

	A (mm)	B (mm)	C (mm)
RubbaClean-T Plus 12	30	11.5	3 - 6.5
RubbaClean-T Plus 17	30	15.5	3 - 6.5
RubbaClean-T Plus 22	30	19.5	3 - 6.5
RubbaClean-T Plus 27	31	24.5	3 - 6.5
RubbaClean-T Plus 22 Strong	32	19.5	3 - 6.5

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Technical Data

Property	Value
Manufacturing Process	Tufted
Pile Composition	100% Polyamide 6.0
Pile Weight	750 g/m ² ±10%
Pile Height	5.5mm ±10%
Total Weight	3440 g/m ² ±10%

Certificates & Approvals

Property	Certificate
Hygienic Certificate	B-BK-60211-0449/19
Anti-Slip Norm According to DIN 51130:2014	R11
Fire Classification According to PN-EN-13501-1+A1:2010	CFL-S1
Declaration of Performance	CE
Material of Aluminium Profile	EN AW 6063 T6
Stationary Load	2500kg/100cm ² - standard version 3400kg/100cm ² - strong version
Environmental Management System Certificate	ISO 14001:2015



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.