


Tacky Anti-Slip Grip Tape Datasheet

Product Code: RC3406

Key Features

- Excellent anti-slip surface
- Self-adhesive backing
- Highly durable
- Suitable for both interior and exterior applications
- Superior UV properties
- Free from phthalates and plasticisers
- Die cuts available to order
- Available in black and transparent colours

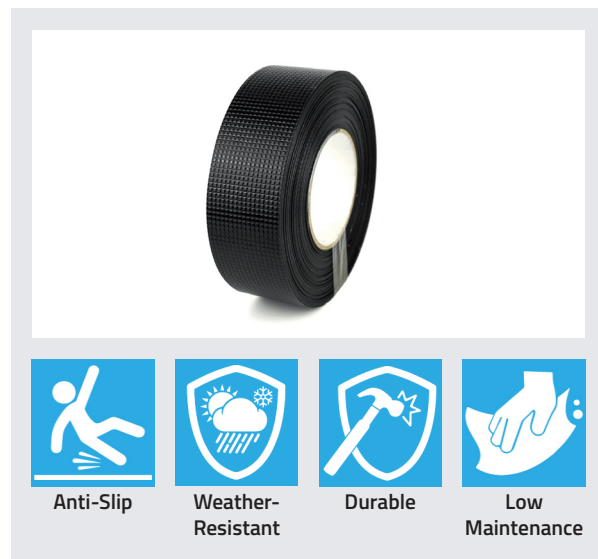

Technical Specification

Property	Value
Upper Film	Elastomer Polymer
Base Film	PET
Upper Film Thickness	0.7mm
Total Thickness	0.92mm
Phthalates	0%
Peel Adhesion FINAT FTMI, 23°C N/25mm	6.7
Tensile Strength Lloyd T5100 N/25mm	166
Widths	15mm up to 1220mm
Lengths	18.3mm, others on request
Adhesive	Transparent Modified Acrylic
Temperature Range	-30°C to +70°C



**ISO
9001 : 2015
REGISTERED**

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Coefficient of Friction Data

Property	Value
Angle	69°
Static Coefficient of Friction, Dry (SCoF)	2.6
Lab Verdict	Potentially Good Grip
Pendulum Test Value (PTV) EN 16165:2021	
Dry	74
Wet	13



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.