

TICO® S/CL - Clamp Strip Datasheet

Product Code: RC1160

Product Description


TICO® S/CL - Clamp Strips isolate vibration between pipework and hangers. They are manufactured from Polychloroprene and Acrylonitrile rubbers bonded with granulated cork in a red/brown colour. Featuring a raised shoulder design for positive location, they are pliable and easy to cut with a maximum working temperature of +100°C.

Technical Specification

Property		Value
Hardness		69° ± 5° (IRHD)
Density		0.80g/cm ³
Coefficient of Friction (TORTUS)	Dry	0.65 to concrete
	Wet	0.5 to bright mild steel
Temperature Range		-40°C to +100°C



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

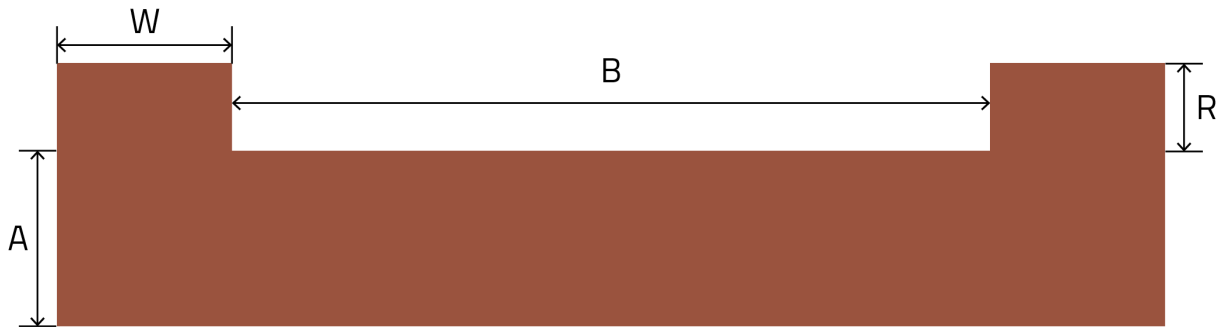

Dimensions

Product Code	Base Thickness (A)	Clip Width (B)	Recess Depth (R)	Wall Width (W)
RC1160-12-1/2	3mm (0.12")	12.5mm (0.49")	1.5mm (0.06")	3mm (0.12")
RC1160-19	3mm (0.12")	19mm (0.75")	1.5mm (0.06")	3mm (0.12")
RC1160-25	5mm (0.20")	25mm (0.98")	2.5mm (0.10")	6mm (0.24")
RC1160-32	5mm (0.20")	32mm (1.26")	2.5mm (0.10")	6mm (0.24")
RC1160-40	6mm (0.24")	40mm (1.57")	2.5mm (0.10")	6mm (0.24")
RC1160-50	6mm (0.24")	50mm (1.97")	2.5mm (0.10")	6mm (0.24")
RC1160-64	6mm (0.24")	64mm (2.52")	2.5mm (0.10")	6mm (0.24")
RC1160-75	9.5mm (0.37")	75mm (2.95")	5mm (0.20")	12.5mm (0.49")
RC1160-100	9.5mm (0.37")	100mm (3.94")	5mm (0.20")	12.5mm (0.49")
RC1160-125	9.5mm (0.37")	125mm (4.92")	5mm (0.20")	12.5mm (0.49")
RC1160-150	12.5mm (0.49")	150mm (5.91")	6mm (0.24")	19mm (0.75")



**ISO
9001 : 2015
REGISTERED**

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.