

TICO® PF/PA - Shock Impact Mounting Pad Datasheet

Product Code: RC1164

Product Description

TICO® PF/PA - Shock Impact Mounting Pad is made from plies of elastomer proofed cotton fabric that is vulcanised together to form a durable pad with a smooth finish. It combines high rigidity with great durability and impact resistance.



Technical Specification

Property	Value
Maximum Load Bearing Capacity	15.5 MN/m ²
Ultimate Breakdown	68.2 MN/m ²
Hardness	95° ± 5° IRHD
Coefficient of Friction	0.8 - fabric surface to concrete 0.6 - fabric surface to bright mild steel
Temperature Range	-40°C to +80°C
Recovery Properties	99.49% Immediately 99.67% 1 minute 99.75% 3 minutes 99.80% 5 minutes 99.83% 30 minutes A pad 150mm ² 25mm thick was compressed to 90% of original its thickness under a static load 7 MN/m ² and on release exhibited these recovery characteristics.




The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Standard Dimensions


Property	Value
Standard Thickness	6mm, 12.5mm, 25mm
Maximum Sheet Size	1200mm x 1200mm

Non-standard widths, sizes and thicknesses available on request.

Static Properties in Compression

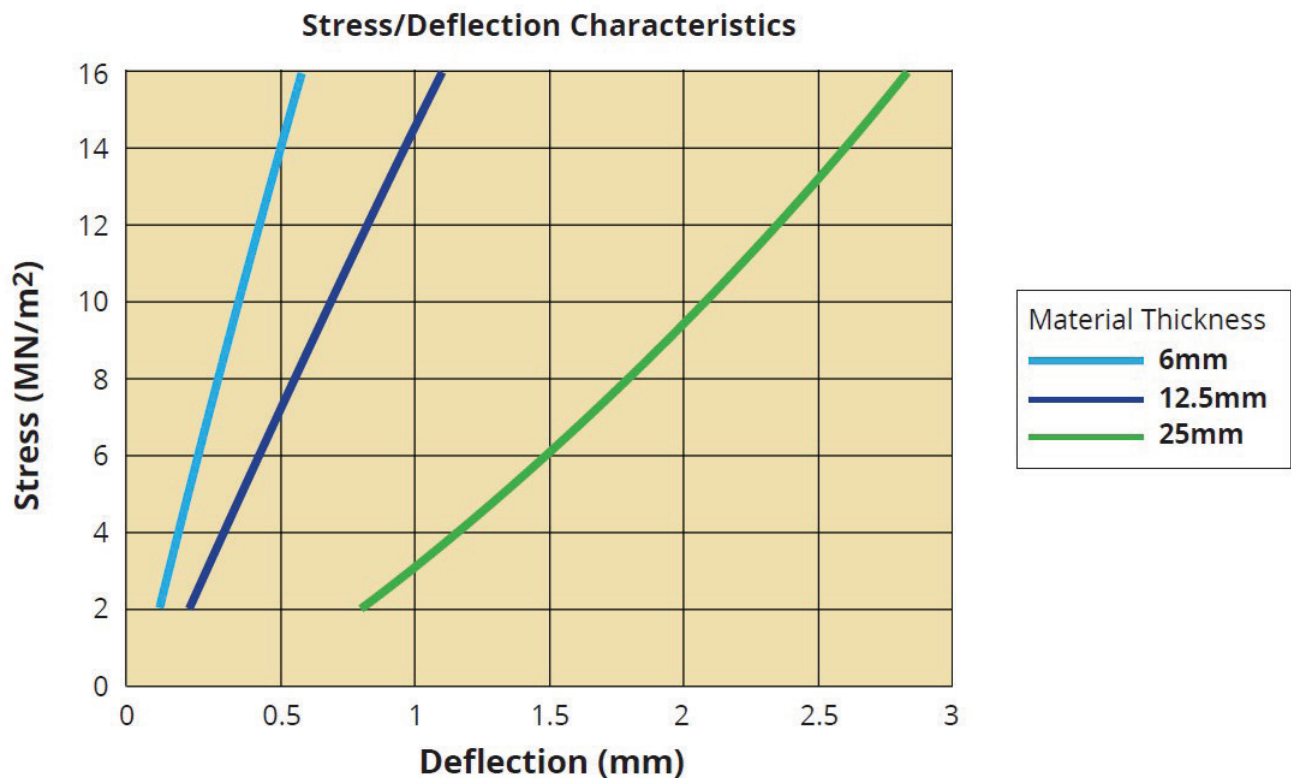

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

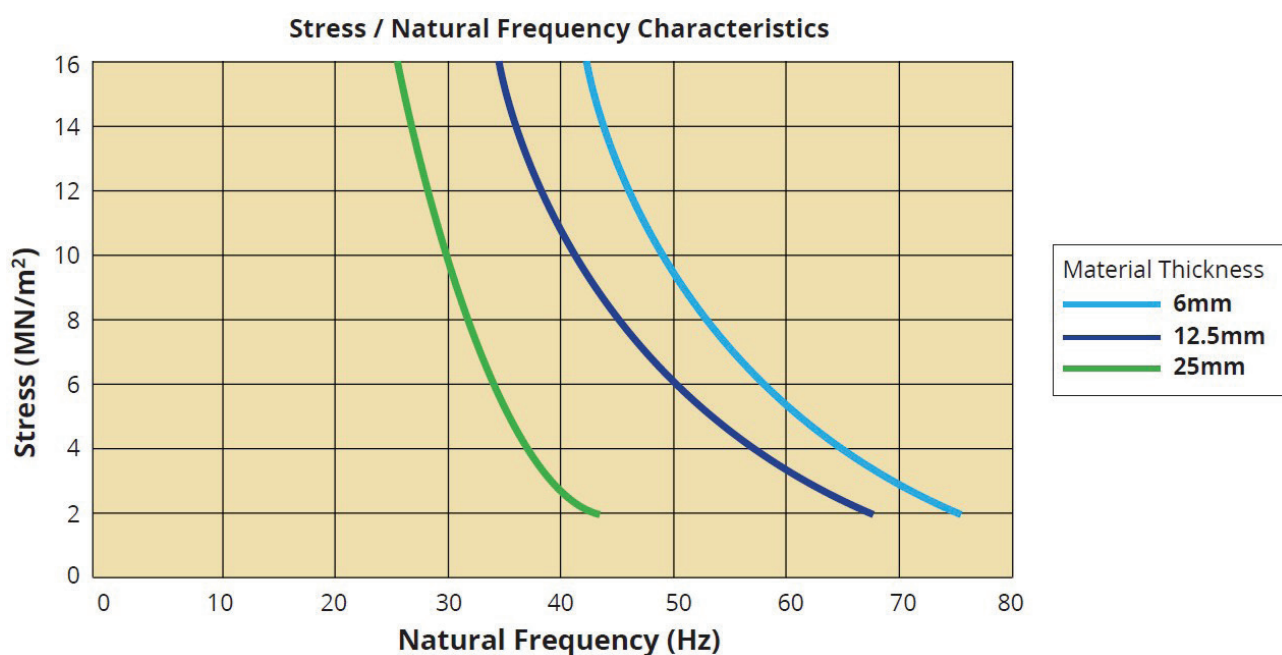

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.