


Neoprene Rubber Slab Datasheet

Product Code: RC0337-SLAB

Product Description

Our neoprene rubber slabs are available in thicknesses of 30mm, 40mm, and 50mm. These extra-thick slabs are ideally suited for heavy-duty applications that require padding, skirting, or cushioning. The neoprene/SBR compound provides good resistance to weathering, ozone, inherent flame, oil, and fuel.

Technical Specification

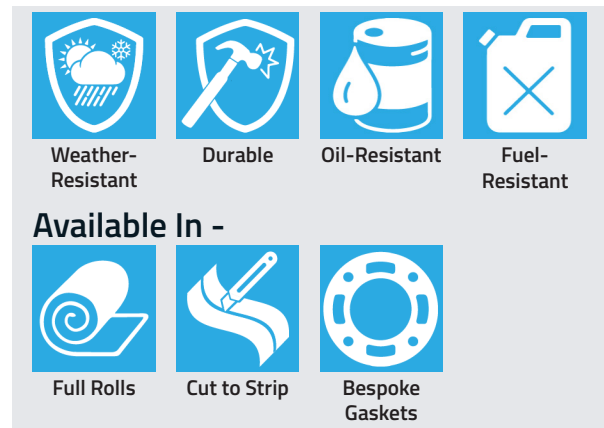

Property	Value
Product	Neoprene Rubber Slab
Compound	CR/SBR
Hardness (Shore A)	70° ± 5°
Tensile Strength	4 MPa
Elongation at Break	210%
Specific Weight	1.5g/cm ³
Working Temperature Range	-30° C to +80° C
Change in Properties	-
Heat Ageing (72hrs @ 70° C)	-
- Tensile Strength	≤20%
- Elongation at Break	≤30%



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.



Manufacturers • Designers • Distributors

Experts in
Rubber

Standard Sizes

Length	Width	Thickness
1m	1m	30mm
1m	1m	40mm
1m	1m	50mm
2m	1m	30mm
2m	1m	40mm
2m	1m	50mm



ISO
9001 : 2015
REGISTERED

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E sales@therubbercompany.com • **W** www.therubbercompany.com • **T** +44 (0) 1794 513 184

The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80

REV 2.0
08/25