


Neoprene T Section - 28mm x 11.6mm

Product Code: RC0200-I0942

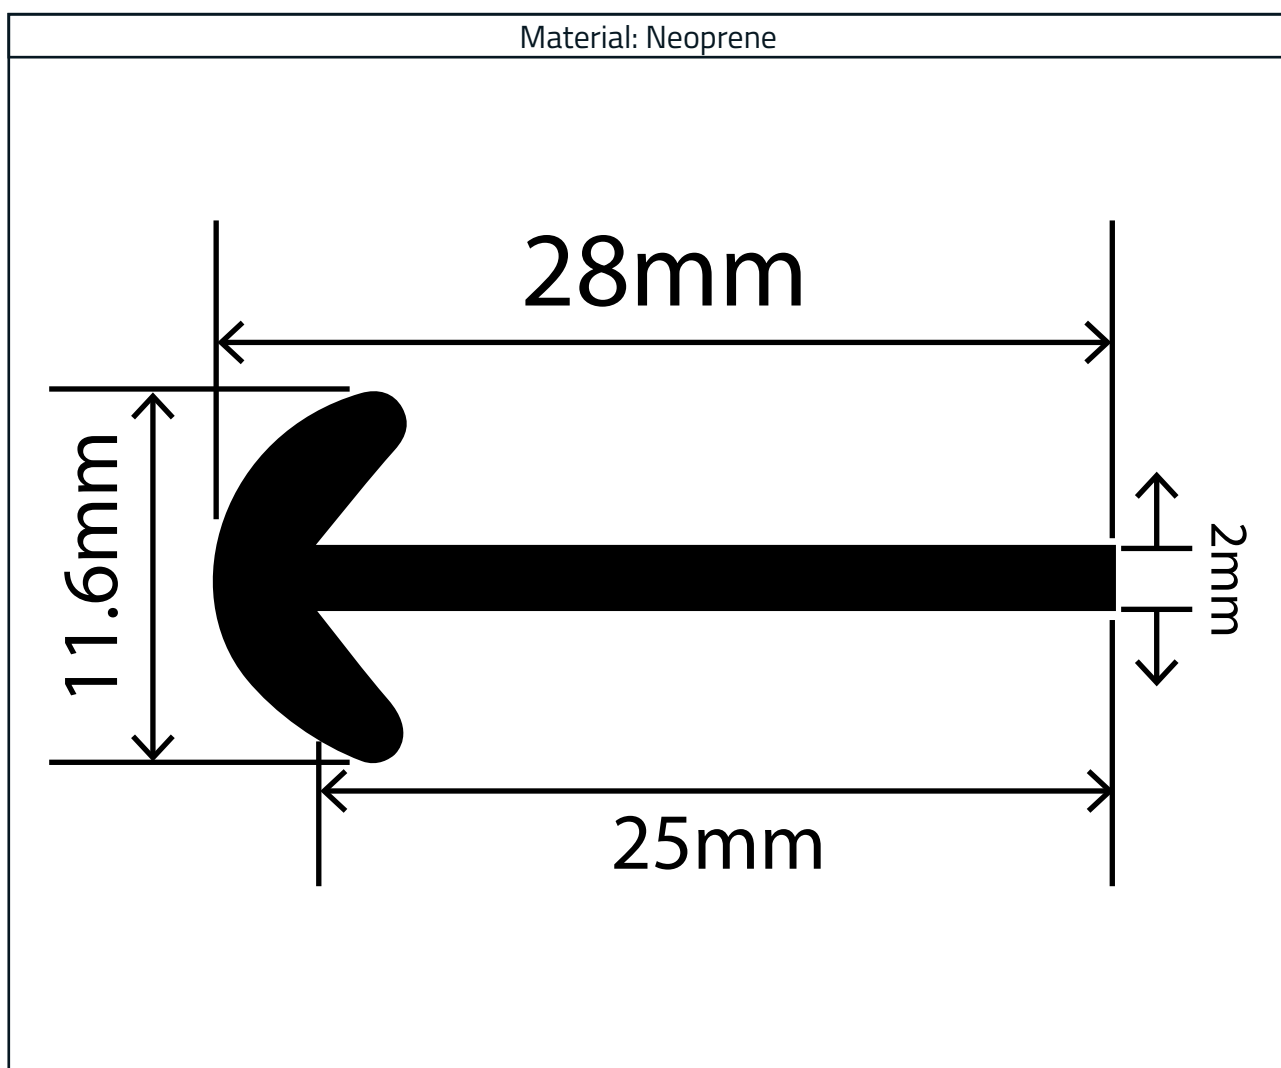

Measurements:

Width	Height
28mm	11.6mm

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Technical Data

Property	Specification	Value
Hardness	70° ± 5°	73°
Tensile Strength	10 MPa min	13 MPa
Elongation at Break	250% min	300%
A14 - Heat Ageing (70hrs @ 100°C)		
Change in Hardness	+15 max	= 10
Change in Tensile	-15% max	-6%
Change in Elongation	-40% max	-23%
B14 - Compression Set (22hrs @ 100°C)	35% max	33%
E014 - Fluid resistance oil No. 1 (70hrs @ 100°C)		
Change in Hardness	± 10% max	= 8
Change in Tensile	-30% max	-15%
Change in Elongation	-30% max	-20%
Change in Volume	-10 to +15%	+3%
E034 - Fluid Resistance Oil No.3 (70hrs @ 100°C)		
Change in Tensile	-60% max	-45%
Change in Elongation	-50%	-47%
Change in Volume	+100%	+85%
F17 - low temp brittleness (non- brittle @ 3 min @ 55°C)	Pass	Pass
Colour	Black	
Weight	0.13kg	
Max Continuous Length	30 metres	

T-shaped black neoprene rubber strip, measuring approximately 22mm long and 13mm wide, with a tail thickness of around 2mm.

Used for sealing doors, windows, and various other areas within classic cars, buses, caravans, aircraft, trains, marine vessels, and other industries.



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.