


Neoprene Round U Channel Profile - 6mm x 9mm

Product Code: RC-L6820

Material: Neoprene

Tolerance: ISO 3302-1:2014 Class E2

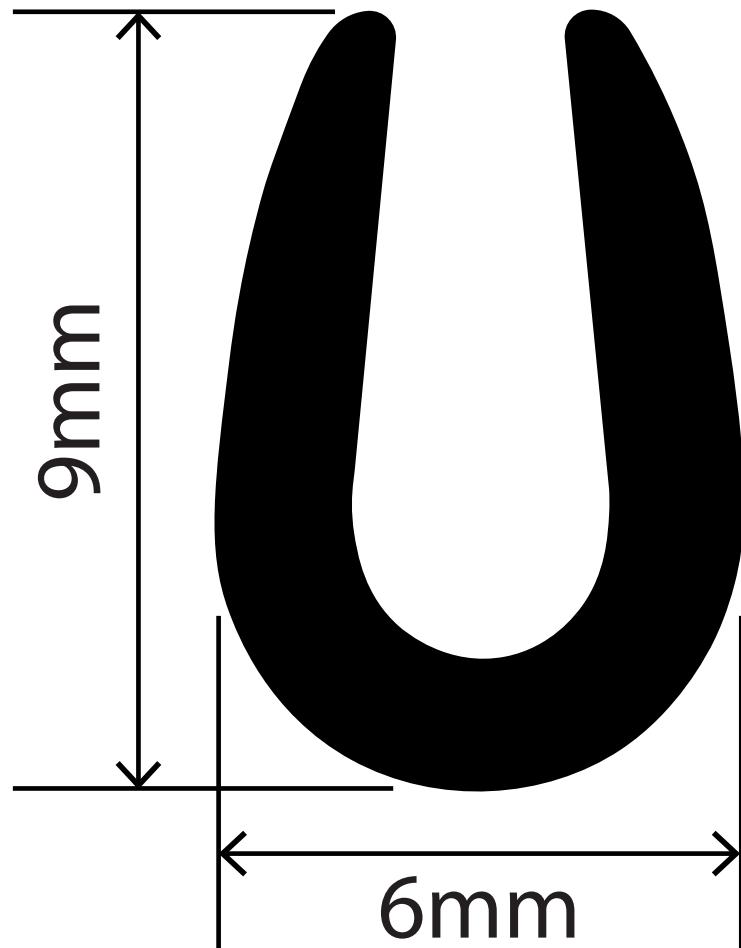

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E sales@therubbercompany.com

W www.therubbercompany.com

T +44 (0) 1794 513 184

The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80



Technical Data

Property	Value
Compound	Neoprene (CR)
Colour	Black
Hardness (IRHD)	50°
Tensile Strength	10.7 MPa
Elongation at Break	715 %
Tear Strength	20.72 N/mm
Compression Set (22 h @ 70° C)	43.89 %
Operature Temperature	-15° C to +90° C
Air Aged (72 h @ 70° C)	
Hardness Change (IRHD)	+ 3
Tensile Strength Change	± 3.64 %
Elongation at Break Change	- 5.77 %

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.