


## EPDM L Profile - 20mm x 10mm

Product Code: RCAP38X38K

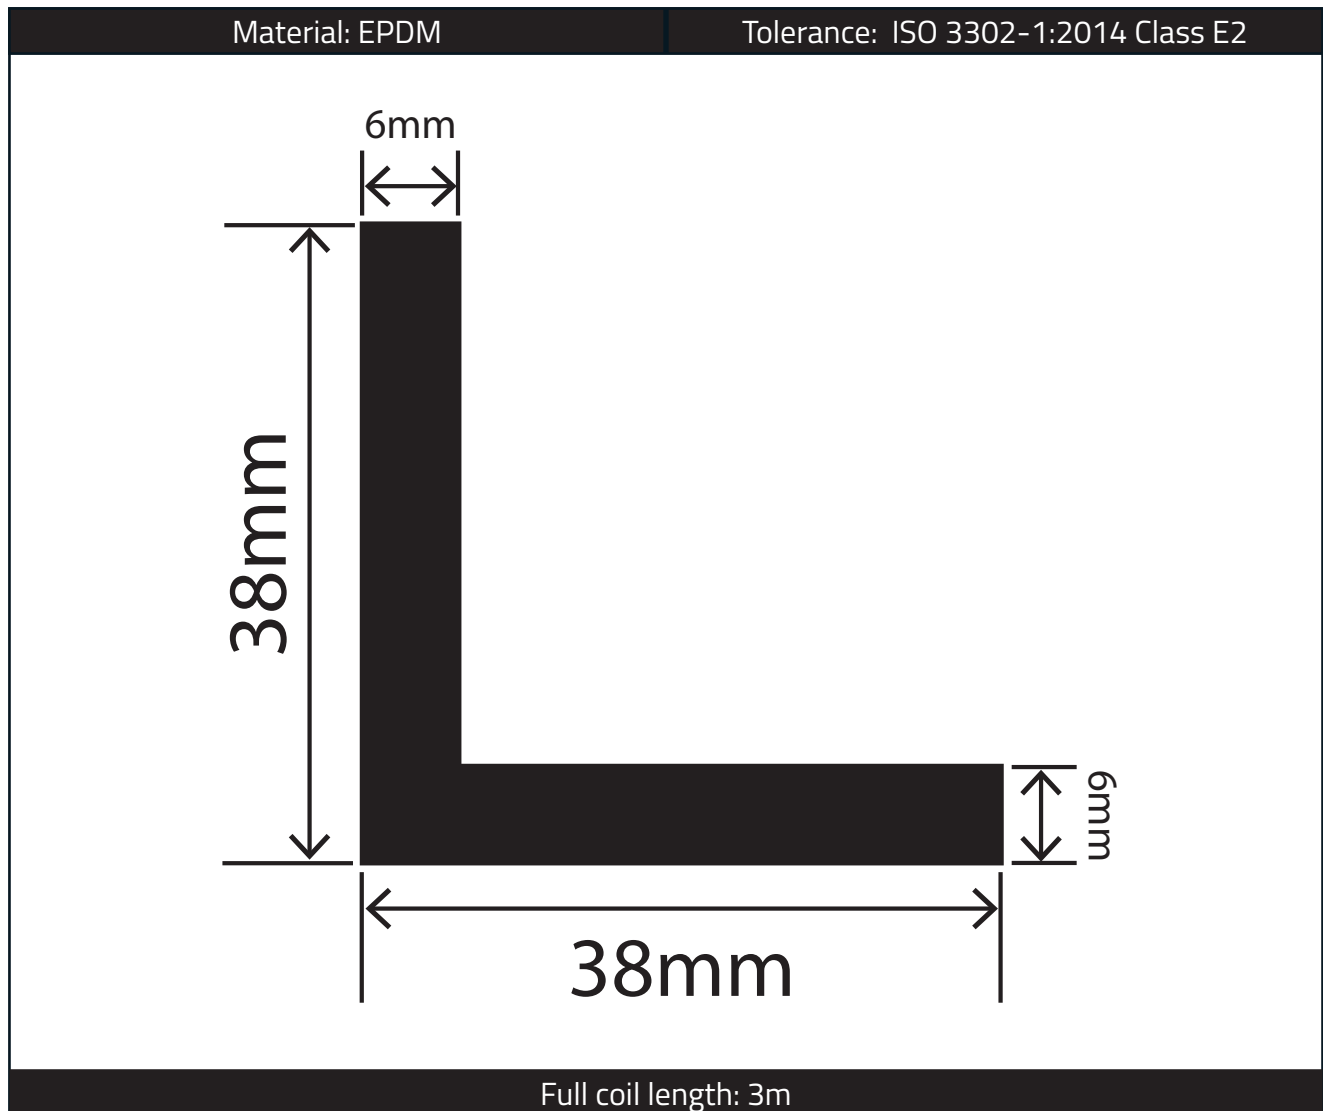

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

## Technical Data

| Property                                  | Value                            |
|-------------------------------------------|----------------------------------|
| Compound                                  | Ethylene Propylene Diene Monomer |
| Colour                                    | Black                            |
| Hardness (IRHD)                           | 69° ± 5°                         |
| Tensile Strength                          | 10.5 MPa                         |
| Elongation at Break                       | 315 %                            |
| Compression Set (22 h @ 70° C)            | 22.5 %                           |
| Tear Strength                             | 12 kN/m                          |
| Compression Set (22 h @ 70° C)            | 7 %                              |
| Ozone Resistance (98 h @ 40° C, 100 pphm) | 6                                |
| Cold Bend Test (-30° C)                   | No Cracking (Pass)               |
| Migration Resistance                      | 0.02 mg                          |
| Staining Resistance                       | No Staining (Pass)               |
| UV Stability                              | No Cracking (Pass)               |
| <b>Heat Ageing (70 h @ 70° C)</b>         |                                  |
| Shore Hardness Change                     | 2°                               |
| Tensile Strength Change                   | 5 %                              |
| Elongation at Break Change                | 0 %                              |
| <b>Heat Ageing (10 days @ 70° C)</b>      |                                  |
| Shore Hardness Change                     | 2°                               |
| Tensile Strength Change                   | -1 %                             |
| Elongation at Break Change                | 7 %                              |

## Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

**E** [sales@therubbercompany.com](mailto:sales@therubbercompany.com)

**W** [www.therubbercompany.com](http://www.therubbercompany.com)

**T** +44 (0) 1794 513 184

The Rubber Company Limited - Registered in England and Wales  
Company Number - 08350831 | VAT Number - GB 156 8355 80

