


Self-Grip Top Seal - 13.5mm x 30mm

Product Code: RCTS13.5X30L

Material: EPDM / Sponge Rubber

Tolerance: ISO 3302-1:2014 Class E2

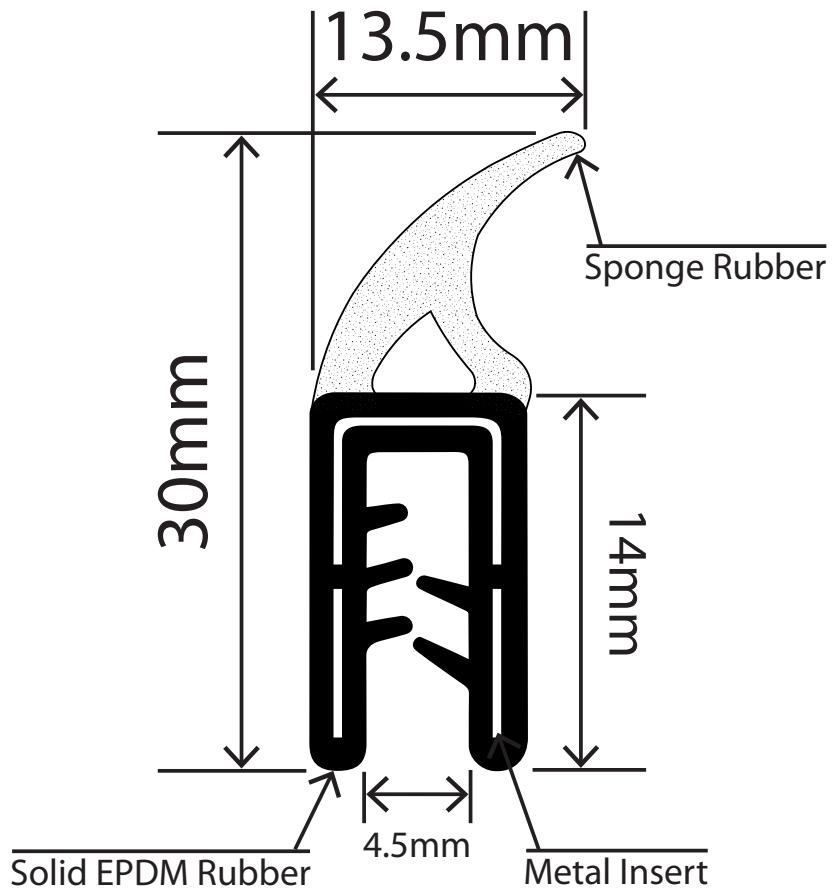

To fit panel: 1.6mm - 3mm

Full coil length: 50m

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E sales@therubbercompany.com

W www.therubbercompany.com

T +44 (0) 1794 513 184

The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80



Technical Data - Solid Rubber Body

Property	Test Method	Value
Material	-	EPDM
Colour	-	Black
Hardness (Shore A)	ASTM D2240	80° ±5
Tensile Strength	ASTM D412	80 kg/cm ²
Tear Resistance	ASTM D624	3 kg/mm
Brittle Point	ASTM D746	-40° C
Compression Set	ASTM D395 Type B	40 % (maximum)
Air Ageing (70 h @ 70° C)		
Change in Shore Hardness	-	+2°
Change in Tensile Strength	-	+15 %
Ozone Resistance (70 h @ 50° C, 50 ppm, 20% elongation)	ASTM D1149	Pass

Technical Data - Sponge Rubber Seal

Property	Test Method	Value
Material	-	Expanded EPDM
Volume Mass (Indicative)	-	550 - 600 g/cm ³
Brittle Point	ASTM D746	-40° C
Ozone Resistance (70 h @ 50° C, 50 ppm, 50% elongation)	ASTM D1149	Pass
Water Absorption (22 h @ 23° C)	ASTM D1056	1.2 % (max)
Tensile Strength	ASTM D412	7 - 10 kg/cm ²
Tear Resistance	ASTM D624	0.6 / 0.8 kg/mm

Technical Data - Metal Carrier

Property	Test Method	Value
Grade	UNI 5961 - 67	Fe50
Tensile Strength	-	50 kg/mm ² (min)
H.R.B. (Rockwell Hardness)	-	80-90

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

E sales@therubbercompany.com

W www.therubbercompany.com

T +44 (0) 1794 513 184

The Rubber Company Limited - Registered in England and Wales
Company Number - 08350831 | VAT Number - GB 156 8355 80

