


NR/SBR Hollow Rubber DD Fender - 40mm x 25mm

Product Code: RC0801-40

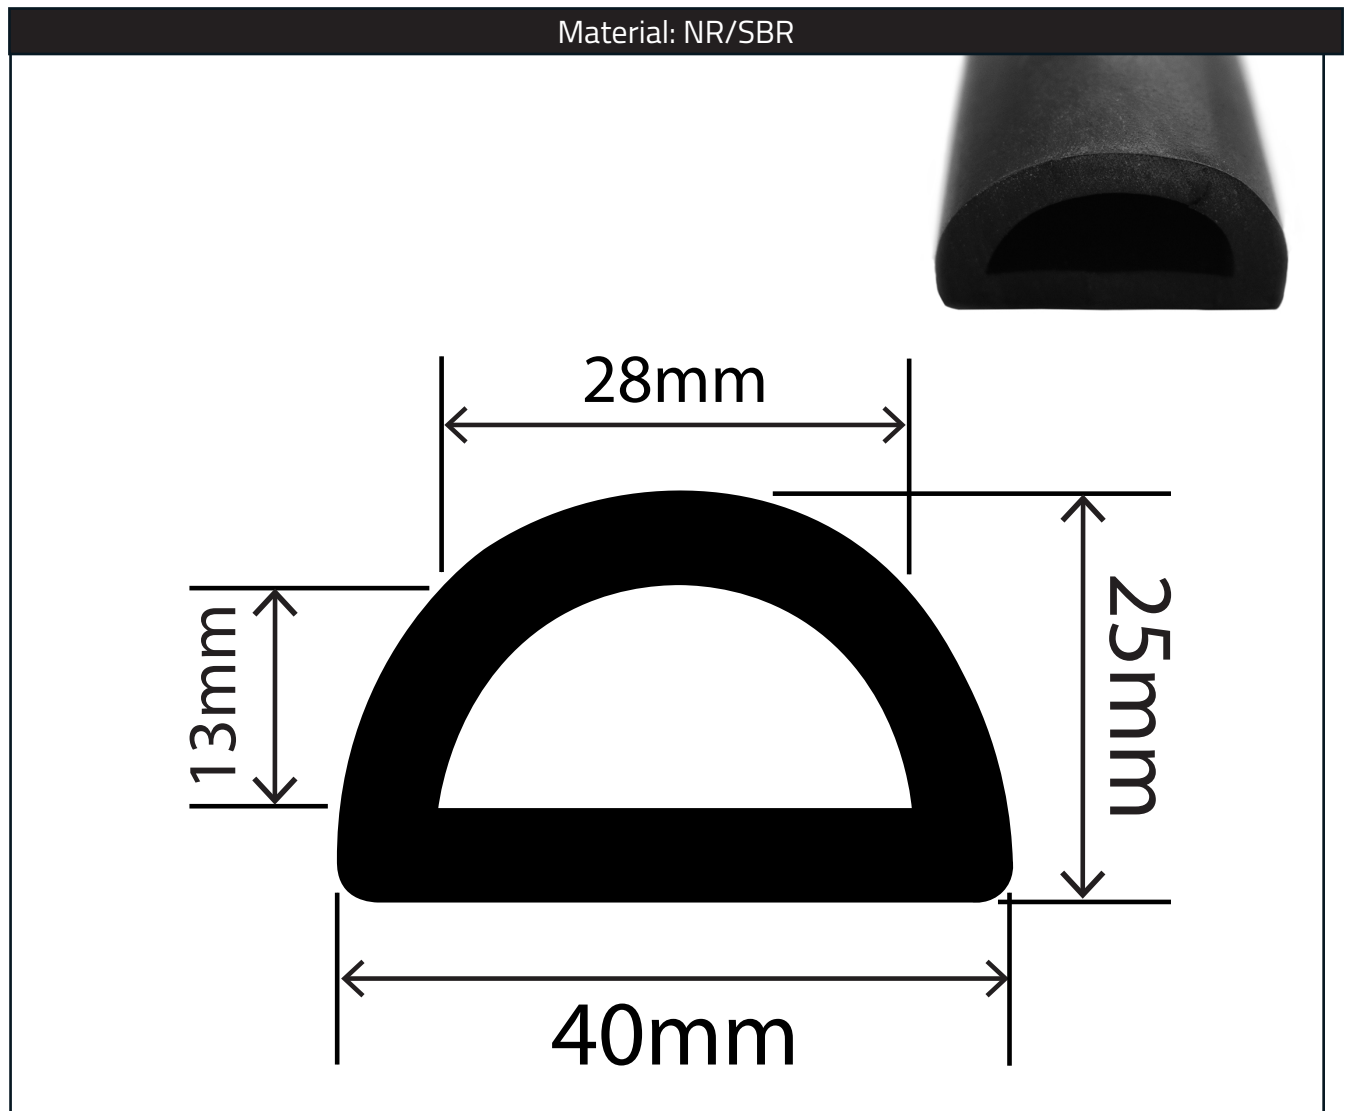

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Technical Data

Property	Test Method	Value
Compound	-	Natural Rubber / Styrene Butadiene Rubber
Colour	-	Black
Hardness (Shore A)	DIN 53505	72°
Density	DIN 53505	1200 kg/m ³
Tensile Strength	DIN 53504	≥16 MPa
Elongation at Break	DIN 53504	≥350 %
Tear Resistance-	DIN 53507	≥80 N/cm
Abrasion Resistance	DIN 53516	≤100 mm ³
Compression Set (24 h @ 70° C)	DIN 53517	≤40 %
Ozone Resistance	ISO 143/1	No Cracking (Pass)
Air Ageing		
Change in Hardness	DIN 53505	≤5
Change in Tensile Strength	DIN 53504	≥80 %
Change in Elongation at Break	DIN 53504	≥80 %

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.