

Electrical Safety Matting ASTM D178

Product Code: RC04133

Key Features

- Health & Safety regulation electrical safety matting
- Fully traceable supply
- Regulatory branding on reverse every 1000mm
- Ensures safety for operatives at lower voltage switchboard and higher equipment areas
- Anti-slip finish

Attributes




Durable



Anti-Slip



Low Maintenance

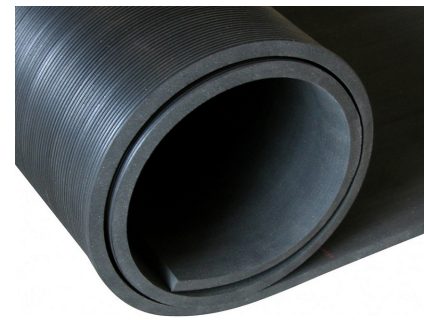

Technical Data

Property	Value
Compound	Styrene Butadiene Rubber / Natural Rubber
Hardness (Shore A)	65° ± 5°
Density	1.3 g/cm ²
Tensile Strength	5 MPa
Elongation at Break	250 %
Abrasion Resistance	180 mm ³
Working Temperature Range	-20° C to +70° C

Class Specifications

Class	Safe Working Voltage
1	7,500 Volts
2	17,500 Volts
3	26,000 Volts
4	36,000 Volts

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.