

## Electrical Safety Matting 7,500V Maximum

Product Code: RC04134

### Key Features

- Safety matting fully tested to specification ASTM D178 ANSI JS.7
- Resistant to 7500 V
- Health & Safety regulation electrical safety matting
- Fully traceable supply
- Regulatory branding on reverse every 1000mm
- Anti-slip finish

### Attributes




Durable



Anti-Slip



Low Maintenance

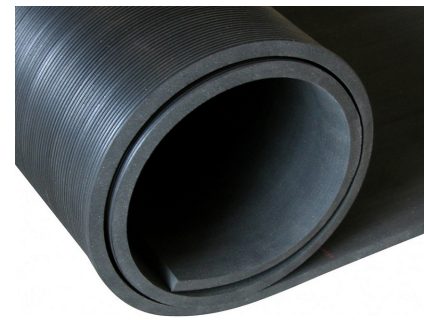

### Technical Data

Property	Value
Compound	Styrene Butadiene Rubber / Natural Rubber
Hardness (Shore A)	60° ± 5°
Density	1.3 g/cm <sup>2</sup>
Tensile Strength	5 MPa
Elongation at Break	250 %
Abrasion Resistance	200 mm <sup>3</sup>
Working Temperature Range	-20° C to +120° C
Safe Working Voltage	7,500 Volts

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

## Standard Sizes

Size	Weight
10m x 0.91m x 4.5mm	5.85 kg/m <sup>2</sup>
10m x 0.91m x 6.5mm	8.45 kg/m <sup>2</sup>
10m x 0.91m x 10mm	13 kg/m <sup>2</sup>

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.