


EPDM L Profile - 38mm x 38mm

Product Code: RCAP38X38K

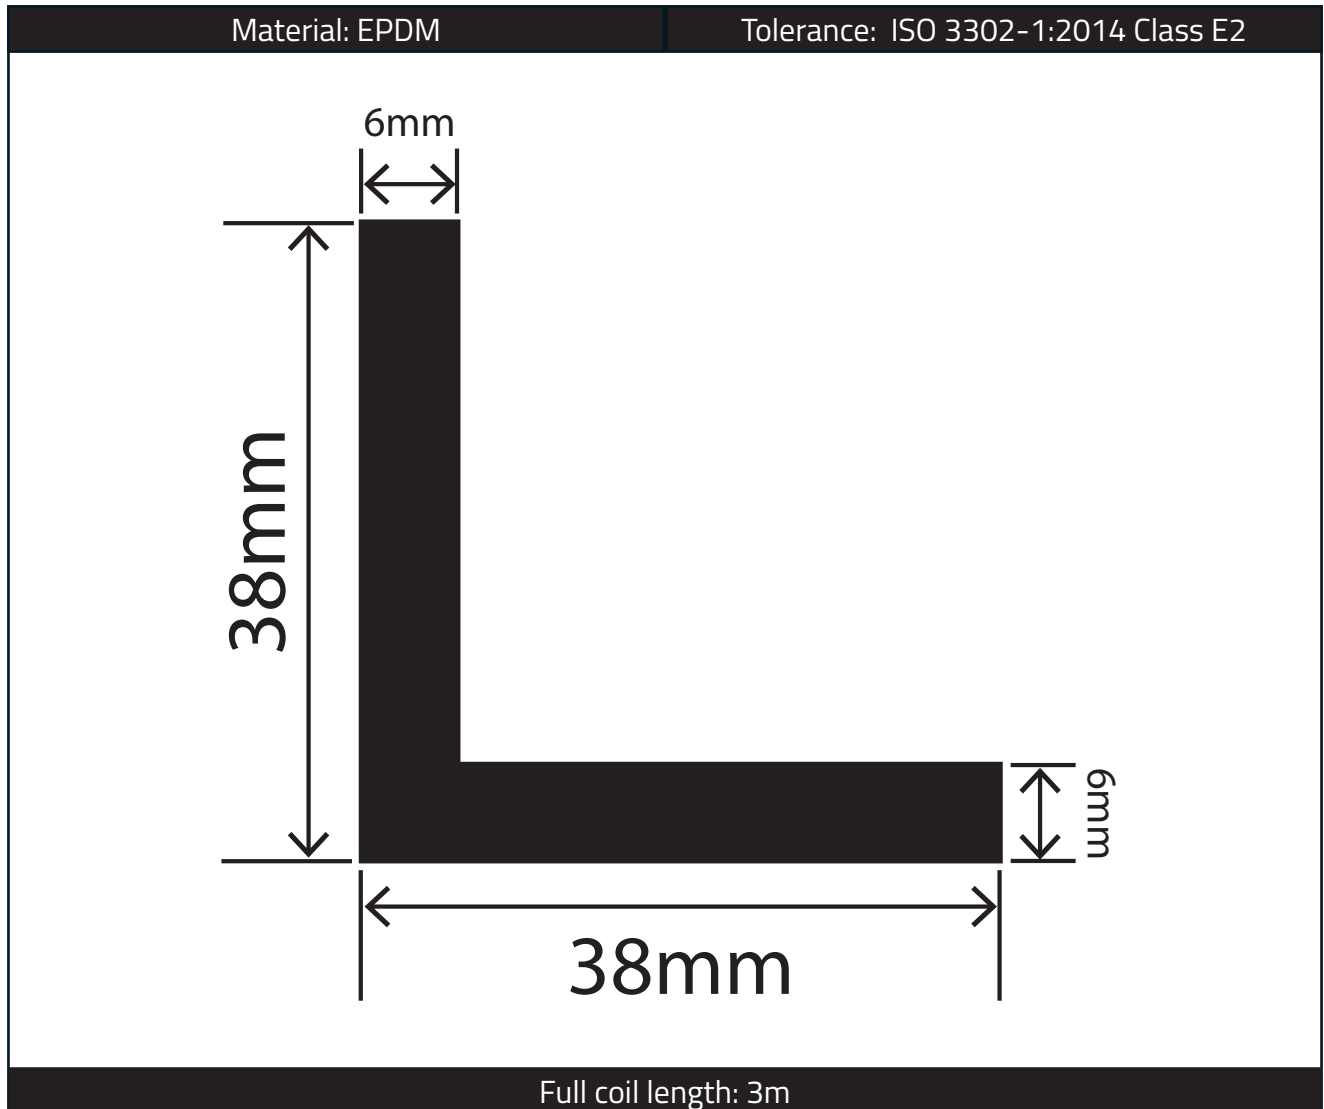

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Technical Data

Property	Value
Compound	Ethylene Propylene Diene Monomer
Colour	Black
Hardness (IRHD)	69° ± 5°
Tensile Strength	10.5 MPa
Elongation at Break	315 %
Compression Set (22 h @ 70° C)	22.5 %
Tear Strength	12 kN/m
Compression Set (22 h @ 70° C)	7 %
Ozone Resistance (98 h @ 40° C, 100 pphm)	6
Cold Bend Test (-30° C)	No Cracking (Pass)
Migration Resistance	0.02 mg
Staining Resistance	No Staining (Pass)
UV Stability	No Cracking (Pass)
Heat Ageing (70 h @ 70° C)	
Shore Hardness Change	2°
Tensile Strength Change	5 %
Elongation at Break Change	0 %
Heat Ageing (10 days @ 70° C)	
Shore Hardness Change	2°
Tensile Strength Change	-1 %
Elongation at Break Change	7 %

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.