

## RubbaClean-R Wide Entrance Matting

Product Code: R-CLEAN-CRW-R

### Key Features

- Durable aluminium entrance matting with rubber insert
- Anti-slip to DIN 51130:2014-02 R12
- Flame-retardant to Cfl-s1
- Suitable for high foot traffic
- Good dirt and debris scraping action
- Easy to clean and move
- Suitable for internal and external use

### Attributes




Anti-Slip



Flame Retardant



Durable

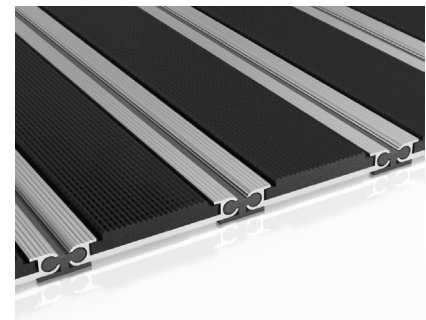


### Technical Data

Property	Test Method	Value
Profile Material	-	Aluminium EN AW 6063 T6
Total Height with Rubber Insert	-	12mm
Application	-	Internal & External
Working Temperature Range	-	-40° C to +70° C
Colour	-	Grey, Black, Brown
Hygiene Certification	-	HK/B/0628/1/2014
Slip Resistance	DIN 51130:2014-02	R12
Fire Classification	PN-EN 13501-1 + A1:2010	Cfl-s1
Non-Destructive Static Load of Aluminium Profile	-	6000 kg / 100 cm <sup>2</sup>
<b>Rubber Insert</b>		
Material	-	Styrene-Ethylene-Butylene-Styrene
Density	-	1.18 g/cm <sup>3</sup>
Hardness (Shore A)	-	70° ± 3°
Tensile Strength	-	> 6 MPa

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

## Matting Profile

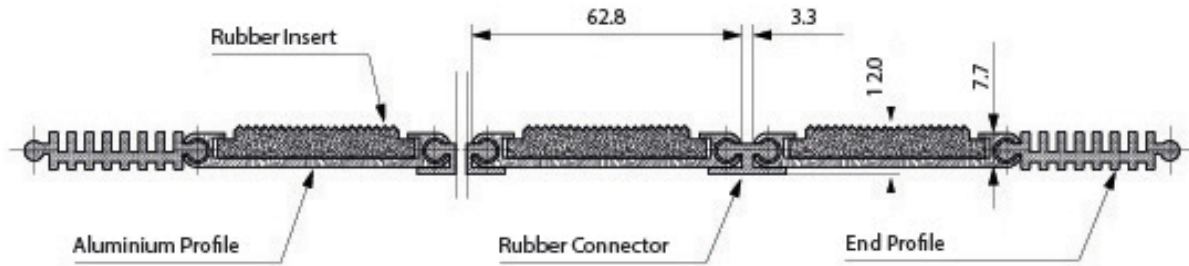

## Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.