

## RubbaClean-T Wide Entrance Matting

Product Code: R-CLEAN-CRW-T

### Key Features

- Durable aluminium entrance matting with textile insert
- Anti-slip to DIN 51130:2014-02 R12
- Flame-retardant to Cfl-s1
- Good moisture absorption
- Suitable for high foot traffic
- Easy to clean and move

### Attributes



Anti-Slip



Flame Retardant



Durable



### Technical Data


Property	Test Method	Value
Profile Material	-	Aluminium EN AW 6063 T6
Total Height with Textile Insert	-	11mm
Application	-	Internal
Temperature	-	Above +5° C
Colour	-	Light Grey, Dark Grey, Brown
Hygiene Certification	-	HK/B/0628/1/2014
Slip Resistance	DIN 51130:2014-02	R12
Fire Classification	PN-EN 13501-1 + A1:2010	Cfl-s1
Non-Destructive Static Load of Aluminium Profile	-	6000 kg / 100 cm <sup>2</sup>

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

## Technical Data Continued

Property	Test Method	Value
<b>Textile Insert</b>		
Manufacturing Process	-	Needle
Bristle Material	-	100% PA6 - Polyamide
Lining Material	-	100% PC - Polycarbonate
Bristle Height	-	5.5mm
Weight	-	3440 g/m <sup>2</sup>
Thickness	-	8mm

## Matting Profile

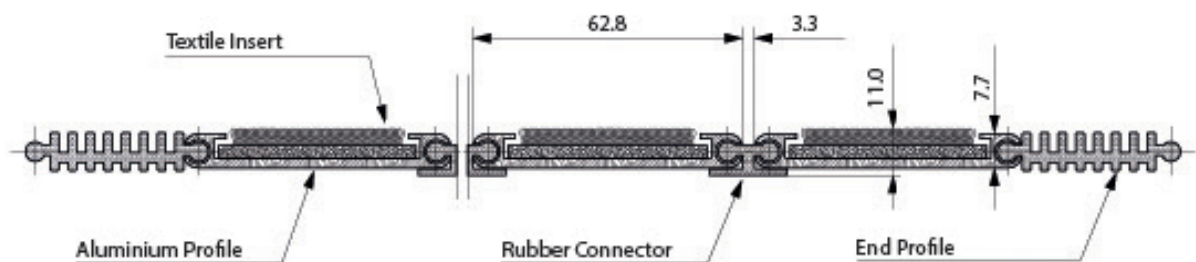

## Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.