

## Interlocking Walkway Mats

Product Code: RC04114-G

### Key Features

- 100% non-porous rubber matting
- Protects the floor below from damage
- Excellent impact and sound absorption
- Durable anti-slip surface
- Good puncture and tear resistance
- Securely connects together

### Attributes




Anti-Slip



Durable



Puncture-Resistant

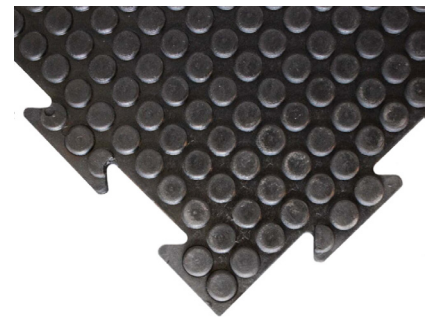

### Technical Data

Property	Value
Compound	Natural rubber / styrene-butadiene rubber blend
Hardness (Shore A)	65°
Density	1.4 g/cm <sup>3</sup>
Tensile Strength	5 MPa
Elongation (min)	300 %
Abrasion Resistance	200mm <sup>3</sup>
Working Temperature Range	-20° C to +70° C
Hot Nut Analysis Test	
- Ignition	No
- Time to reach the ring including nut application	Did not reach
- Classification	Class 1

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

## Standard Size

Stock Size	Weight
1.0m x 1.0m x 17mm	23.8 kg/m <sup>2</sup>

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

**E** [sales@therubbercompany.com](mailto:sales@therubbercompany.com)

**W** [www.therubbercompany.com](http://www.therubbercompany.com)

**T** +44 (0) 1794 513 184

The Rubber Company Limited - Registered in England and Wales  
Company Number - 08350831 | VAT Number - GB 156 8355 80

