

RoofGrip TPO Roof Walkway Matting

Product Code: RC04127

Key Features

- Creates a safe walkway on TPO and EPDM roofing
- Slip resistance to DIN 51130: R9
- Excellent drainage to DIN 51130: V10
- Certified stable in winds up to 55mph (89km/hr)
- Contours to roof structure and protects membrane
- Two-layer durable welded construction

Attributes




Anti-Slip



Weather-Resistant



Durable

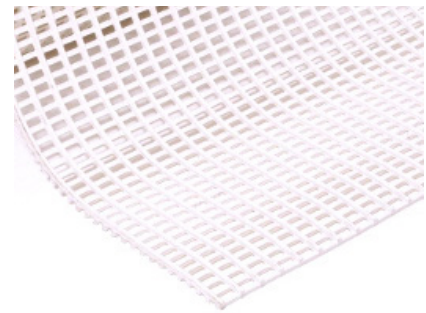

Technical Data


Property	Value
Compound	Thermoplastic Polyolefin
Acoustic Insulation	Excellent sound absorption properties
Drainage	DIN 51130: V10
Fire Resistance	EN ISO 13501-1: 2007 Dfl-s1
Slip Resistance	DIN 51130: R9 ASTM E303: Dry - 67 (with lines), 97 (across lines); Wet - 54 (with lines), 77 (across lines)
Working Temperature Range	-23° C to +60° C
UV Resistance	Resistant to PVC degradation
Wind Resistance	When loose laid, RoofGrip TPO can withstand winds up to 55mph (89 km/h)
Environment	100 % recyclable

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.


Standard Sizes

Stock Size	Thickness	Weight
10m x 60cm	12mm	5.2 kg/m ²
10m x 75cm	12mm	5.2 kg/m ²


Colour Range

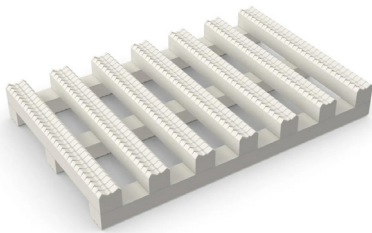

White

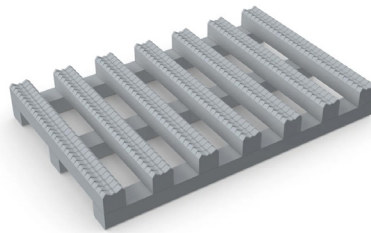

Grey

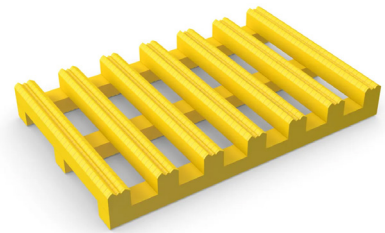

Yellow

Installation

RoofGrip TPO matting is supplied in 10m rolls, so installation is quick and simple.

- Loose lay, no fixtures required
- Durable, one-piece construction
- Simple to cut to size
- Contours to the roof structure

Cleaning & Maintenance

Keeping RoofGrip TPO matting clean is a quick and easy job.

- Dirt and debris will naturally fall away from the surface of the matting
- Simply lift or roll matting to clean
- Easy to clean with a high pressure hose

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.