

FlexiRidge Durable Ribbed Matting

Product Code: RC04165

Key Features

- Slip-resistant wide ribbed surface
- Fast drainage of liquids, dirt and debris
- Tough PVC with high tear and puncture resistance
- Withstands heavy foot traffic and industrial use
- Built-in vibration, acoustic and impact protection
- Resistant to oils, acids and chemicals
- Contours to uneven surfaces
- Easy to cut and simple to install

Attributes




Durable



Chemical-Resistant



Anti-Slip

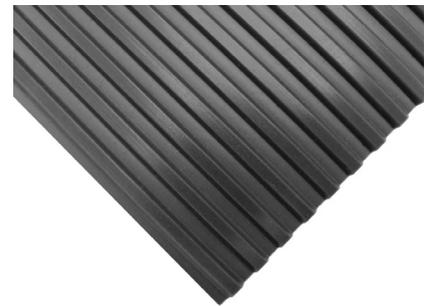

Technical Data

Property	Value
Compound	Polyvinyl chloride
Chemical Resistance	Resistant to most acids, alkalines and oils
Fire Resistance	EN 13501-1: 2007 Bfl-s1
Temperature Range	-23° C to +60° C
UV Resistance	Resistant to PVC degradation
Reversion	Thermoplastic shrinkage can result in size reductions up to 2 %
Environment	100 % recyclable

Standard Size

Stock Size	Thickness	Weight
20m x 1m	2.8mm	2.45 kg/m ²

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Colour Options



Dark Grey



Green

Installation

Supplied in 20m rolls, FlexiRidge is quick and easy to install.

- Loose lay, no permanent fixtures required
- Easy to cut to size
- Holes can be cut to accommodate pipes
- Contours to uneven surfaces

Cleaning & Maintenance

Keeping FlexiRidge matting clean is a quick and easy job.

- Light and easy to handle
- Simply roll or lift to clean
- No special cleaning tools required
- Easy to wipe clean

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.