

Flexi Dot Eco Matting

Product Code: RC04168

Key Features

- Low profile anti-slip matting
- Fire Resistance to EN 13501-1: 2007 Bfl-s1 standard
- Raised stud pattern improves grip and reduces slip risk
- Suitable for industrial use with heavy foot traffic
- Resistant to chemicals, oil and acids
- Good tear and abrasion resistance
- Easy to cut and simple to install

Attributes




Anti-Slip



Durable



Chemical-Resistant

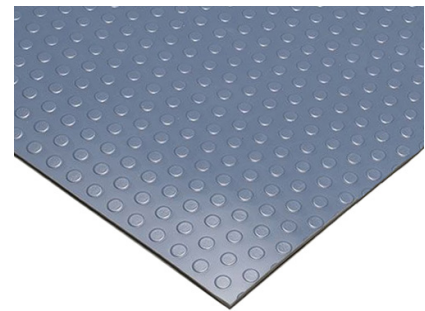

Technical Data

Property	Value
Compound	Flexible DINP Plasticised Polyvinyl Chloride
Chemical Resistance	Resistant to most acids, alkalines and oils
Fire Resistance	EN 13501-1: 2007 Bfl-s1
Working Temperature Range	-23° C to +60° C
UV Resistance	Resistant to PVC degradation
Reversion	Thermoplastic shrinkage can result in size reductions up to 2 %
Environment	100 % recyclable

Standard Sizes

Product	Stock Size	Thickness	Weight
Flexi Dot Eco Matting Standard	25m x 0.98m	1.6mm	2.35 kg/m ²
Flexi Dot Eco Matting Extra	20m x 0.98m	2.5mm	3.75 kg/m ²

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Colour Range



Black



Grey



Blue



Red

Installation

Flexi Dot matting is supplied in 25m (standard), 20m (extra) rolls, so installation is quick and simple.

- Loose lay, no permanent fixtures required
- Simple to cut to size
- Holes can be cut to accommodate pipes
- Contours to the floor or work surface

Cleaning & Maintenance

Keeping Flexi Dot matting clean is a quick and easy job.

- Simply lift or roll matting to clean
- Easy to clean with a vacuum or mop
- No special cleaning tools required

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.