

PVCLine Anti-Slip Matting

Product Code: RC04169

Key Features

- Slip resistant to DIN 51130: R11, DIN 51097: C, ASTM 1677: 1.0/0.8
- Excellent drainage to DIN 51130: V10
- Cfl-s1 fire rated (EN 13501-1)
- Anti-bacterial and anti-fungal properties
- Good underfoot comfort
- Contours to uneven surfaces
- Open grid construction

Attributes




Anti-Slip



Chemical-Resistant



Low Maintenance

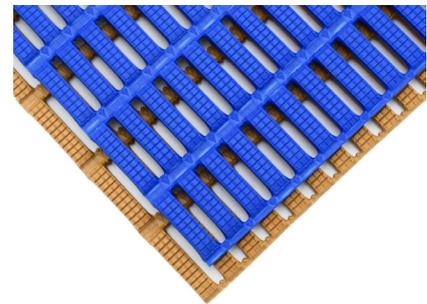

Technical Data

Properties	Data
Compound	Polyvinyl chloride
Acoustic Insulation	Excellent sound absorption properties
Chemical Resistance	Resistant to most acids, alkalines and oils
Fire Resistance	EN13501-1 : 2007 and classified - Cfl - S1
Slip Resistance	ASTM F 1677 - Dry/Wet: 1.0/0.8 DIN 51130: R11, V10 DIN 51097: Classification C
Working Temperature Range	-23° C to +60° C
UV Resistance	Resistant to PVC degradation
Reversion	Thermoplastic shrinkage can result in size reductions up to 2 %
Hygiene	Naturally resistant to bacteria growth
Environment	100 % recyclable

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Standard Sizes

Stock Size	Thickness	Weight
60cm x 10m	6mm	3.70 kg/m ²
91cm x 10m	6mm	3.70 kg/m ²


Colour Range




Red




Blue

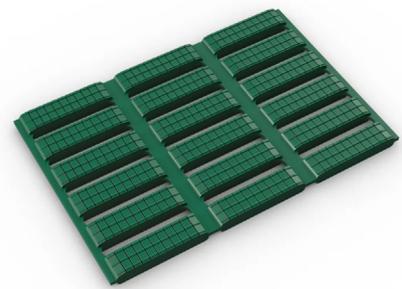

Green

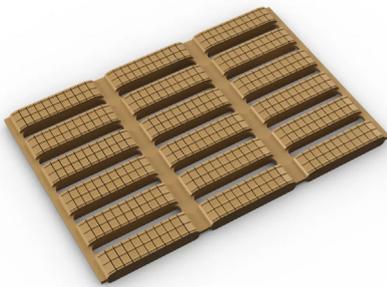

Beige

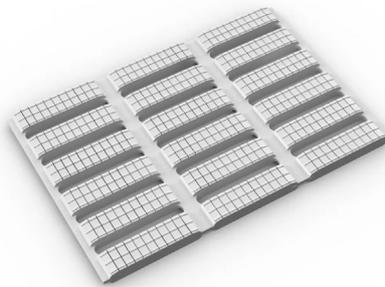

White



Black

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Cleaning & Maintenance

Regular cleaning can help maintain both the effectiveness and the life span of our PVCLine Anti-Slip Matting.

While this product does contain anti-bacterial and anti-fungal additives in order to protect against fungal and bacterial contamination. We do recommend regular cleaning to remove light grease and oils, food fat, wax and acrylic polishes.

Preparation

Check the matting is free from any loose items like litter and clothing fibres.

Hand Cleaning

Regular hand cleaning should be done as required, using an alkaline cleaning fluid as per the manufacturer's instructions. The matting can be cleaned in place by simply apply the cleaning solution with a spray bottle or mop and allowing it to penetrate any grease or dirt. It can then be cleaned using a stiff deck brush to work the cleaning fluid into the surface dirt. Allow to soak before rinsing with clean water.

Machine Cleaning

The frequency of which you machine clean will depend on how much traffic the area gets. Spray the surface with an alkaline solution and then, using a cylindrical brush machine, clean the top surface in the direction of the top ribs. If there's an etched pattern on the top ribs where dirt can easily collect, make additional cross passes to ensure a thorough clean.

To clean the underside of the matting, roll it up and then roll back out, leaving the underside facing upwards. Repeat the cleaning instructions above.

Steam Cleaning

Steam cleaning can also be carried out, with good results using a nozzle pressure of approximately 6894.8 kN/m² (1000 lbs psi) and a water temperature of approximately 100°C. Cleaning fluid should be diluted according to the manufacturer's recommendation.

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.