

Heel-Safe Non-Slip Matting

Product Code: RC04170

Key Features

- Certified slip resistance to DIN 51130: R12
- Excellent drainage to DIN 51130: V10
- Close groove design suitable for all footwear types
- Excellent grip in dry and wet conditions
- Perfect for high level pedestrian traffic
- Does not need to be fixed or bonded to the ground
- Fire resistant properties

Attributes




Anti-Slip



Flame Retardant



Chemical-Resistant

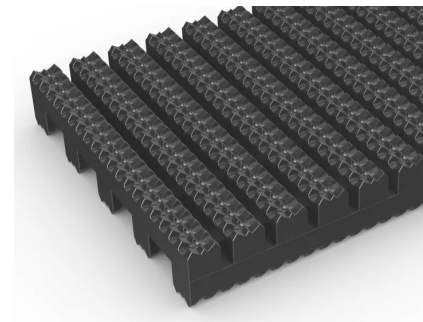

Technical Data


Property	Value
Compound	Polyvinyl Chloride
Acoustic Insulation	Excellent sound absorption properties
Chemical Resistance	Resistant to most acids, alkalines and oils
Fire Resistance	EN ISO 13501-1:2007-Bfl-s1 ASTM E648, Class 1
Slip Resistance	DIN 51130: R12, V10
Temperature Range	-23° C to +60° C
UV Resistance	Resistant to PVC degradation
Reversion	Thermoplastic shrinkage can result in size reductions up to 2 %
Environment	100 % recyclable

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.


Standard Size

Stock Size	Thickness	Weight
5m x 1.2m	14mm	10.5 kg/m ²
10m x 0.6m	14mm	10.5 kg/m ²
10m x 0.91m	14mm	10.5 kg/m ²


Colour Options

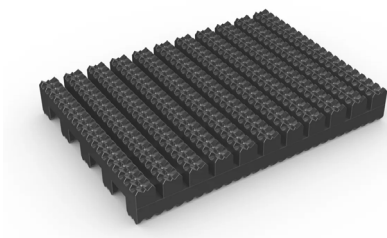


Dark Grey

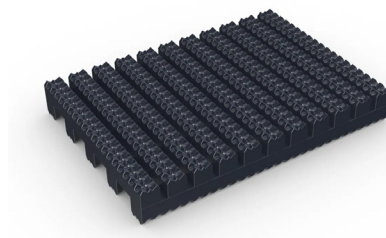

Oxford Blue

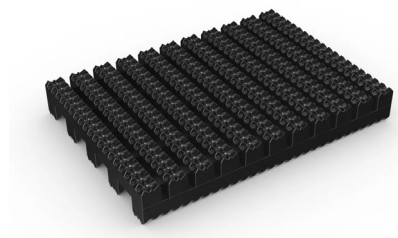

Black

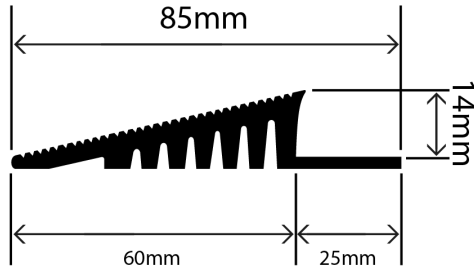


Product Code: RCAP85X14P

Size: 60mm x 14mm

Our PVC ramped edging is supplied in 10.1m rolls with cold welding paste for secure installation in all conditions.

Available in: Black, Dark Grey, Dark Brown, Holly Green, Oxford Blue and Yellow

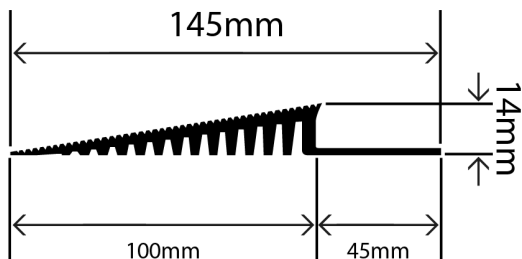

Product Code: RCAP145X14P

Size: 100mm x 14mm

Our PVC ramped edging is supplied in 10.1m rolls with cold welding paste for secure installation in all conditions.

Available in: Black, Dark Grey and Yellow

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Installation

Supplied in 5m or 10m rolls, Heel-Safe matting is quick and easy to install.

- No special tools or site visits required
- Integrates with all internal floor coverings
- Fits with different well depths
- Easy to cut to size
- Contours to the floor surface

Cleaning & Maintenance

Keeping Heel-Safe matting clean is a quick and easy job.

- Reduces cleaning intervals
- Simply lift or roll to clean
- No special clean tools required
- Vacuum or clean with a pressure hose

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.