

Diamond Top PVC Matting

Product Code: RC04182

Key Features

- Extremely hard-wearing and durable
- Resistant to most solvents and chemicals
- Anti-slip resistance to BS EN 13036-4: 2011
- Flame retardant to BS EN ISO 9239-1:2010, BS EN ISO 11925-2:2010, and Bfl-s1
- Good anti-fatigue properties
- Interlocking edges - quick and simple to install
- Ramped edges available

Attributes




High Strength



Anti-Slip



Flame Retardant

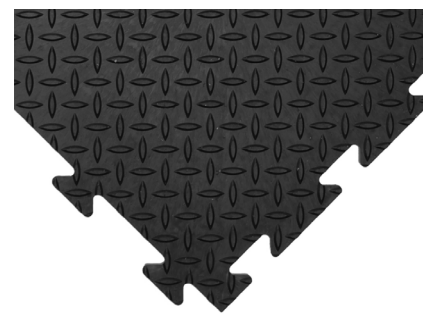

Technical Data


Property	Value
Compound	Polyvinyl chloride (recycled PVC for black)
Reaction to Fire Classification	BS EN ISO 9239-1:2010 BS EN ISO 11925-2:2010 Bfl-s1
Slip Resistance	BS EN 13036-4:2011
Load Testing	Up to 3.35 t per tile
Suitability	Indoors and outdoors
Colour	Black, Grey

Standard Sizes

Size	Thickness	Weight
495mm x 495mm	14mm	1.9 kg

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Matting Ramped Edging

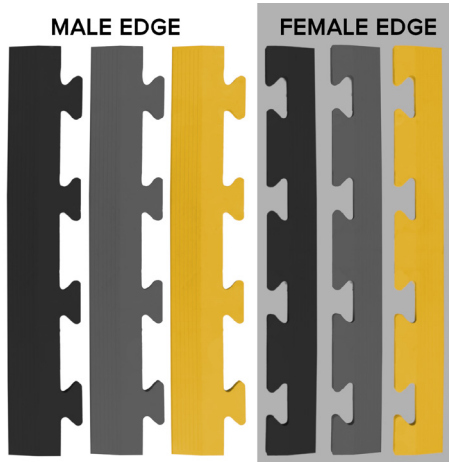

Our PVC ramped edging is available with either male or female connectors to add a safe, non-trip edging to your matting.

Size: 500mm x 14mm

Available in: Black, Grey, and Yellow

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.