

# Coin Lock PVC Matting

Product Code: RC04190

## Key Features

- Extremely hard-wearing and durable
- Flame retardant to BS EN ISO 9239-1:2010, BS EN ISO 11925-2:2010, and Bfl-s1
- Good anti-fatigue properties
- Resistant to most solvents and chemicals
- Good thermal and acoustic insulation
- Interlocking edges - quick and simple to install
- Ramped edges available

## Attributes




High Strength



Anti-Slip



Flame Retardant

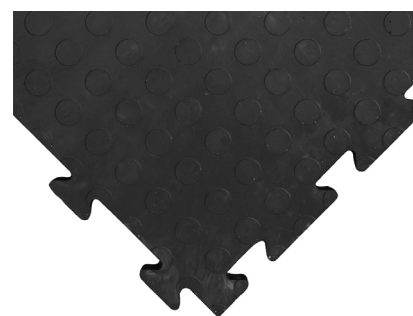

## Technical Data


Property	Value
Compound	Polyvinyl Chloride (recycled PVC for black)
Reaction to Fire Classification	BS EN ISO 9239-1:2010 BS EN ISO 11925-2:2010 Bfl-s1
Load Testing	Up to 3.35 t per tile
Suitability	Indoors and outdoors
Colour	Black, Grey

## Standard Sizes

Size	Thickness
495mm x 495mm	12mm

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

## Matting Ramped Edging

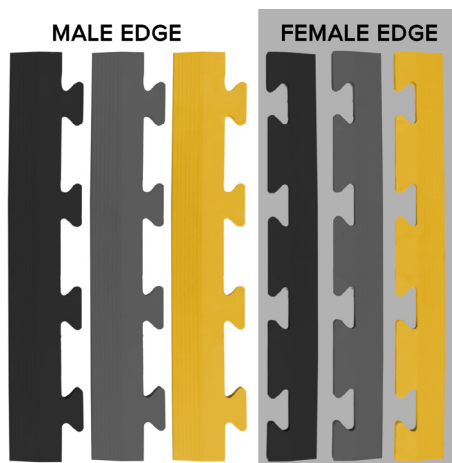

Our PVC ramped edging is available with either male or female connectors to add a safe, non-trip edging to your matting.

Size: 500mm x 14mm

Available in: Black, Grey, and Yellow

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.