



Grip Top Matting

Product Code: RC06100-GT

Key Features

- Exceptional anti-slip properties in both dry and wet conditions
- Deep textured gripping rubber surface
- Reinforced heavy-duty fabric backing
- Durable and resilient construction
- Excellent tear resistance properties
- Easy to fit and cut to size
- Low maintenance

Attributes

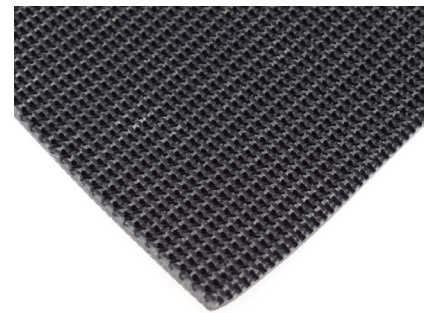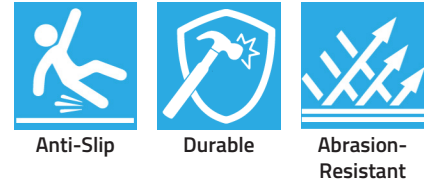

Technical Data

Property	Value
Compound	Natural Rubber / Styrene-Butadiene Rubber
Hardness (Shore A)	70°
Density (Specific Gravity)	1.5
Tensile Strength	30 kg/cm ²
Elongation at Break	200 %
Abrasion Resistance	200 mm ³
Working Temperature Range	-30 °C to + 70 °C
Colour	Black

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Standard Size

Stock Size	Thickness	Weight
1.2m x 50m	5mm / 1 ply	4.8 kg/m ²
1.2m x 100m	5mm / 1 ply	4.8 kg/m ²
1.5m x 50m	5mm / 1 ply	4.8 kg/m ²
1.5m x 100m	5mm / 1 ply	4.8 kg/m ²
1.2m x 50m	6mm / 2 ply	5.2 kg/m ²
1.2m x 100m	6mm / 2 ply	5.2 kg/m ²
1.5m x 50m	6mm / 2 ply	5.2 kg/m ²
1.5m x 100m	6mm / 2 ply	5.2 kg/m ²

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.