

## RubbaClean-T Eco Entrance Matting

Product Code: R-CLEAN-CR-ECO-T

### Key Features

- Durable aluminium entrance matting with recycled polyamide (ECONYL®) textile insert
- Anti-slip to DIN 51130:2014-02 R11
- Flame-retardant to Cfl-s1
- Designed for high footfall and trolley traffic
- Good moisture absorption
- Rollable for easy cleaning and maintenance

### Attributes




Anti-Slip



Flame Retardant



Durable

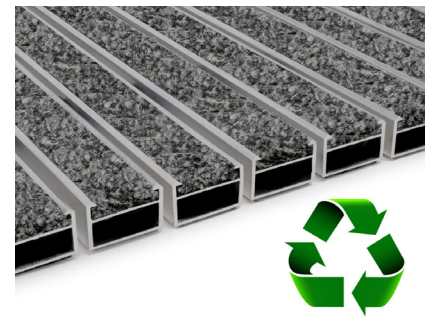


### Technical Data

| Property                  | Test Method             | Value   |
|---------------------------|-------------------------|---|
| Profile Material          | -                       | Aluminium EN AW 6063 T6   |
| Application               | -                       | For Indoor Use  |
| Working Temperature Range | -                       | +5° C and Above   |
| Colour                    | -                       | Grey, Black, Brown  |
| Hygiene Certification     | -                       | HK/B/0628/1/2014  |
| Slip Resistance           | DIN 51130:2014          | R11   |
| Fire Classification       | PN-EN 13501-1 + A1:2010 | Cfl-s1  |
| Static Load               | -                       | 3500 kg / 100 cm <sup>2</sup> - Standard Version<br>10000 kg / 100 cm <sup>2</sup> - Strong Version |

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

| Property              | Test Method | Value                            |
|-----------------------|-------------|----------------------------------|
| <b>Textile Insert</b> |             |                                  |
| Fibre Material        | -           | 100% Recycled Polyamide (Econyl) |
| Backing Material      | -           | Polyurethane (PU)                |
| Fibre Weight          | -           | 850 g/m <sup>2</sup>             |
| Total Weight          | -           | 3630 g/m <sup>2</sup>            |
| Fibre Height          | ISO 1765    | 7mm                              |
| Total Thickness       | ISO 1765    | 9mm                              |
| Static Charge         | ISO 6356    | -0.4 kV                          |

## Matting Profile

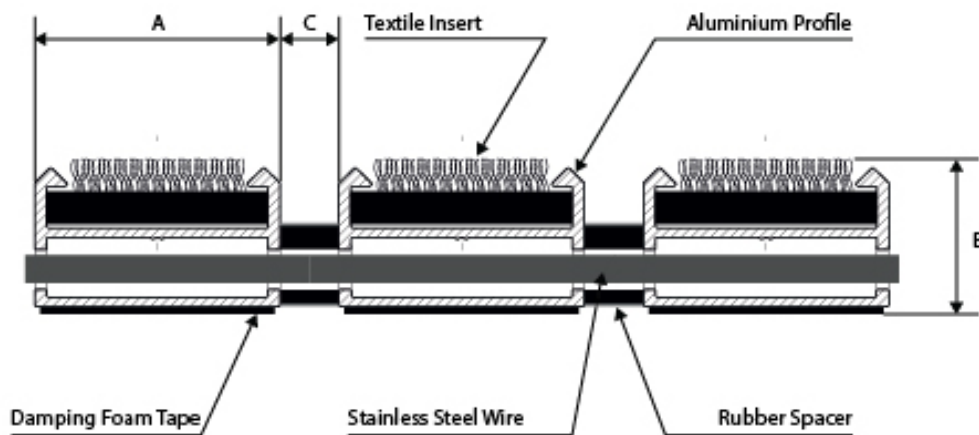

## Measurements

| Matting Type                                 | Height (mm) | A (mm) | B (mm) | C (mm) |
|--|-------------|--------|--------|--------|
| RubbaClean-T Eco Entrance Matting - Standard | 12          | 30     | 15     | 3-5    |
| RubbaClean-T Eco Entrance Matting - Standard | 17          | 30     | 18     | 3-5    |
| RubbaClean-T Eco Entrance Matting - Standard | 22          | 30     | 22     | 3-5    |
| RubbaClean-T Eco Entrance Matting - Standard | 27          | 30     | 28     | 3-5    |
| RubbaClean-T Eco Entrance Matting - Strong   | 22          | 32     | 22     | 3-5    |
| RubbaClean-T Eco Entrance Matting - Premium  | 22          | 51     | 22     | 3-5    |

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

## Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.