

RubbaClean-R EPDM Entrance Matting

Product Code: R-CLEAN-CS-P-R

Key Features

- Durable aluminium entrance matting with EPDM rubber insert
- Anti-slip to DIN 51130:2014-02 R12
- Flame-retardant to Cfl-s1
- Designed for high footfall and trolley traffic
- Excellent dirt, mud and snow scraping action
- High resistance to moisture, corrosion and temperature changes
- Rolls up for easy cleaning and maintenance

Attributes




Anti-Slip



Flame Retardant



Durable

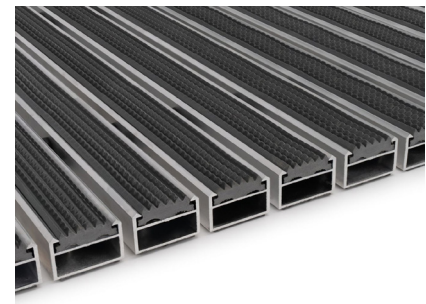


Technical Data

Property	Test Method	Value
Profile Material	-	Aluminium EN AW 6063 T6
Application	-	Internal & External
Working Temperature Range	-	-40° C to +70° C
Colour	-	Grey, Black, Brown
Hygiene Certification	-	B-BK-60211-0449/19
Slip Resistance	DIN 51130:2014	R12
Fire Classification	PN-EN 13501-1 + A1:2010	Cfl-s1
Static Load	-	3500 kg /100 cm ² - Standard Version 10000 kg /100 cm ² - Strong Version
EPDM Rubber Insert		
Material	-	Ethylene Propylene Diene Monomer
Density	-	1.37 g/cm ³
Hardness (Shore A)	-	85° ± 3°
Tensile Strength	-	> 23 MPa

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Matting Profile

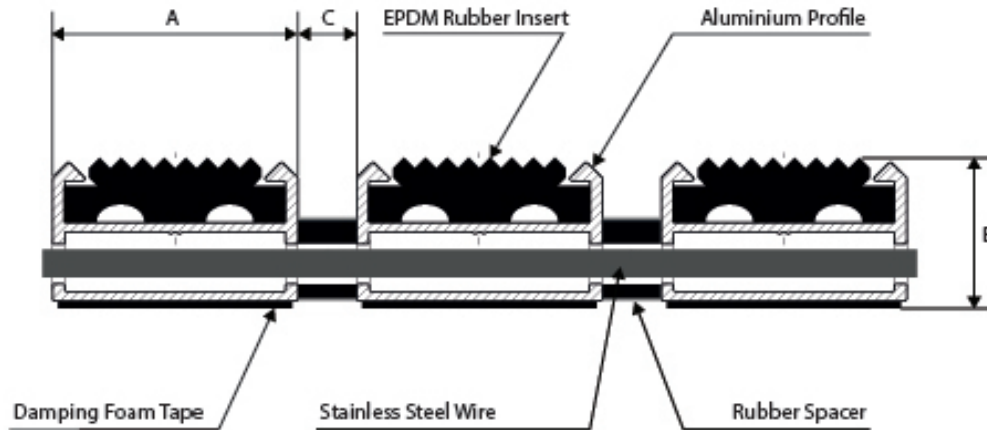

Measurements

Matting Type	Height (mm)	A (mm)	B (mm)	C (mm)
RubbaClean-R EPDM Entrance Matting - Standard	12	30	14	3-6.5
RubbaClean-R EPDM Entrance Matting - Standard	17	30	18	3-6.5
RubbaClean-R EPDM Entrance Matting - Standard	22	30	22	3-6.5
RubbaClean-R EPDM Entrance Matting - Standard	27	31	27	3-6.5
RubbaClean-R EPDM Entrance Matting - Strong	22	32	22	3-6.5

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.