

RubbaClean-S Entrance Matting

Product Code: R-CLEAN-CS-S

Key Features

- Durable aluminium entrance matting with brush insert
- Anti-slip to DIN 51130:2014-02 R13
- Flame-retardant to Cfl-s1
- Excellent dirt scraping action
- Suitable for high foot traffic
- High resistance to moisture, corrosion and temperature changes
- Rolls up for easy cleaning and maintenance

Attributes



Anti-Slip



Flame Retardant



Durable




Technical Data

Property	Test Method	Value
Profile Material	-	Aluminium EN AW 6063 T6
Application	-	Internal & External
Working Temperature Range	-	-40° C to +70° C
Colour	-	Grey, Black, Brown
Hygiene Certification	-	HK/B/0628/1/2014
Slip Resistance	DIN 51130:2014	R13
Fire Classification	PN-EN 13501-1 + A1:2010	Cfl-s1
Static Load	-	3500 kg /100 cm ² - Standard Version 10000 kg /100 cm ² - Strong Version
Scrub Insert		
Material	-	Polypropylene
PA6.6 Fibre Thickness	-	0.4mm
Stainless Steel Wire Thickness	-	0.7mm
According to the manufacturers declaration, the scrub insert meets the requirements of EU Directive 2002/95/EC, which entered into force on 01/07/2006, and is manufactured in accordance with Directive RoHS 2002/95/EC.		

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Matting Profile

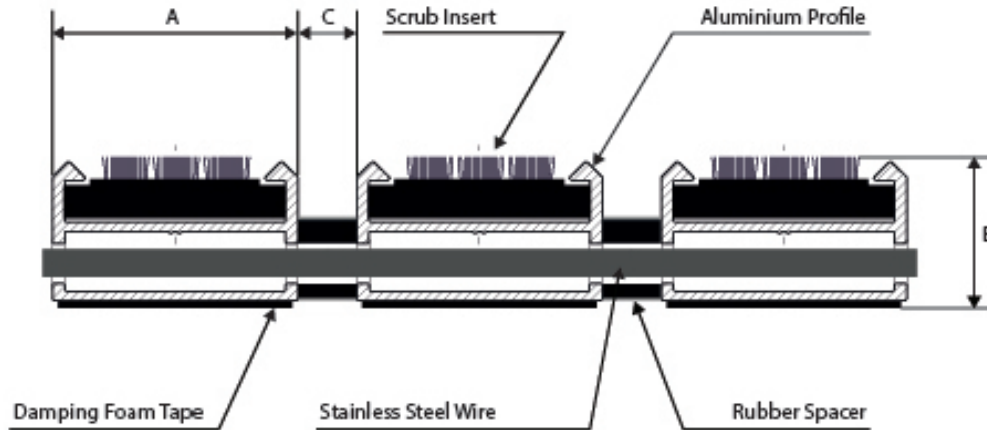

Measurements

Matting Type	Height (mm)	A (mm)	B (mm)	C (mm)
RubbaClean-S Entrance Matting - Standard	12	30	18	3-5
RubbaClean-S Entrance Matting - Standard	17	30	22	3-5
RubbaClean-S Entrance Matting - Standard	22	30	25	3-5
RubbaClean-S Entrance Matting - Standard	27	31	32	3-5
RubbaClean-S Entrance Matting - Strong	22	32	25	3-5
RubbaClean-S Entrance Matting - Premium	22	52	25	3-5

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.