


Self-Grip Edge Trim - 10.5mm x 14mm

Product Code: RC-B2205

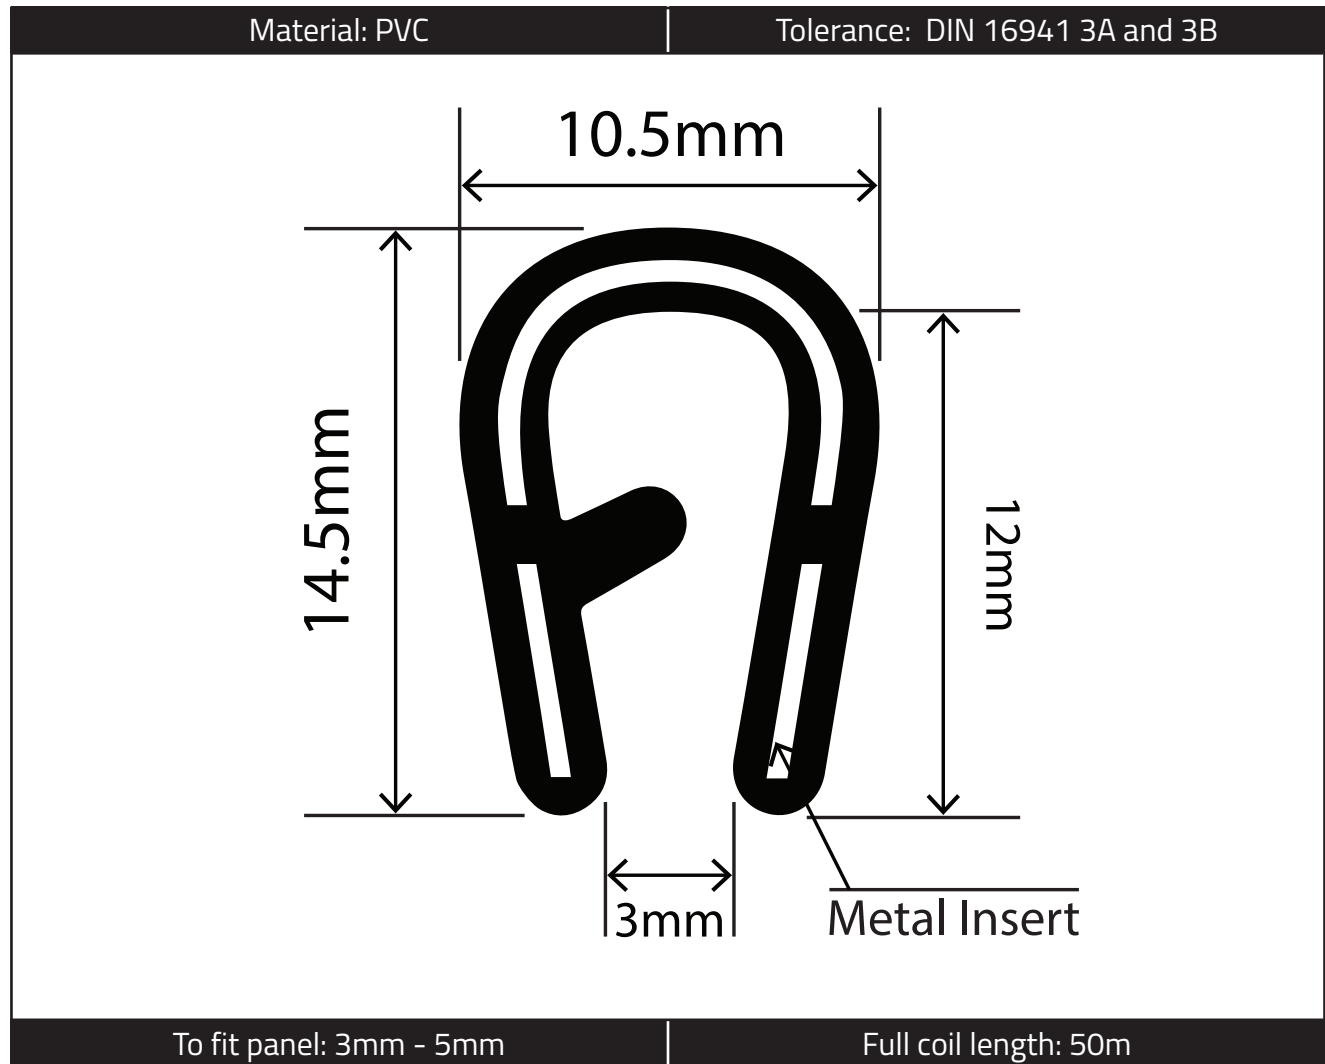

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Technical Data - Body

Property	Test Method	Value
Material	-	Polyvinyl chloride
Hardness (Shore A)	ISO 868	75°
Density	ISO 868	1.35 - 1.45 g/cm ³
Tensile Strength	UNE 21-117	>11 MPa
Elongation at Break	UNE 21-117	>260 %
Compression Set	ASTM D395	40 % (maximum)
Ozone Resistance	-	PASS
Working Temperature Range	-	-10° C to +60° C
Ageing (70 h @ 70° C)		
Change in Hardness	-	+2°
Change in Tensile Strength	-	+15 %

Technical Data - Metal Insert

Property	Test Method	Value
Material	-	Steel
H.R.B. (Rockwell Hardness)	-	80 - 90
Tensile Strength	-	50 kg/mm (minimum)

Approvals



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.