


T Section - 23.5mm x 5.5mm

Product Code: RC0200-I0926

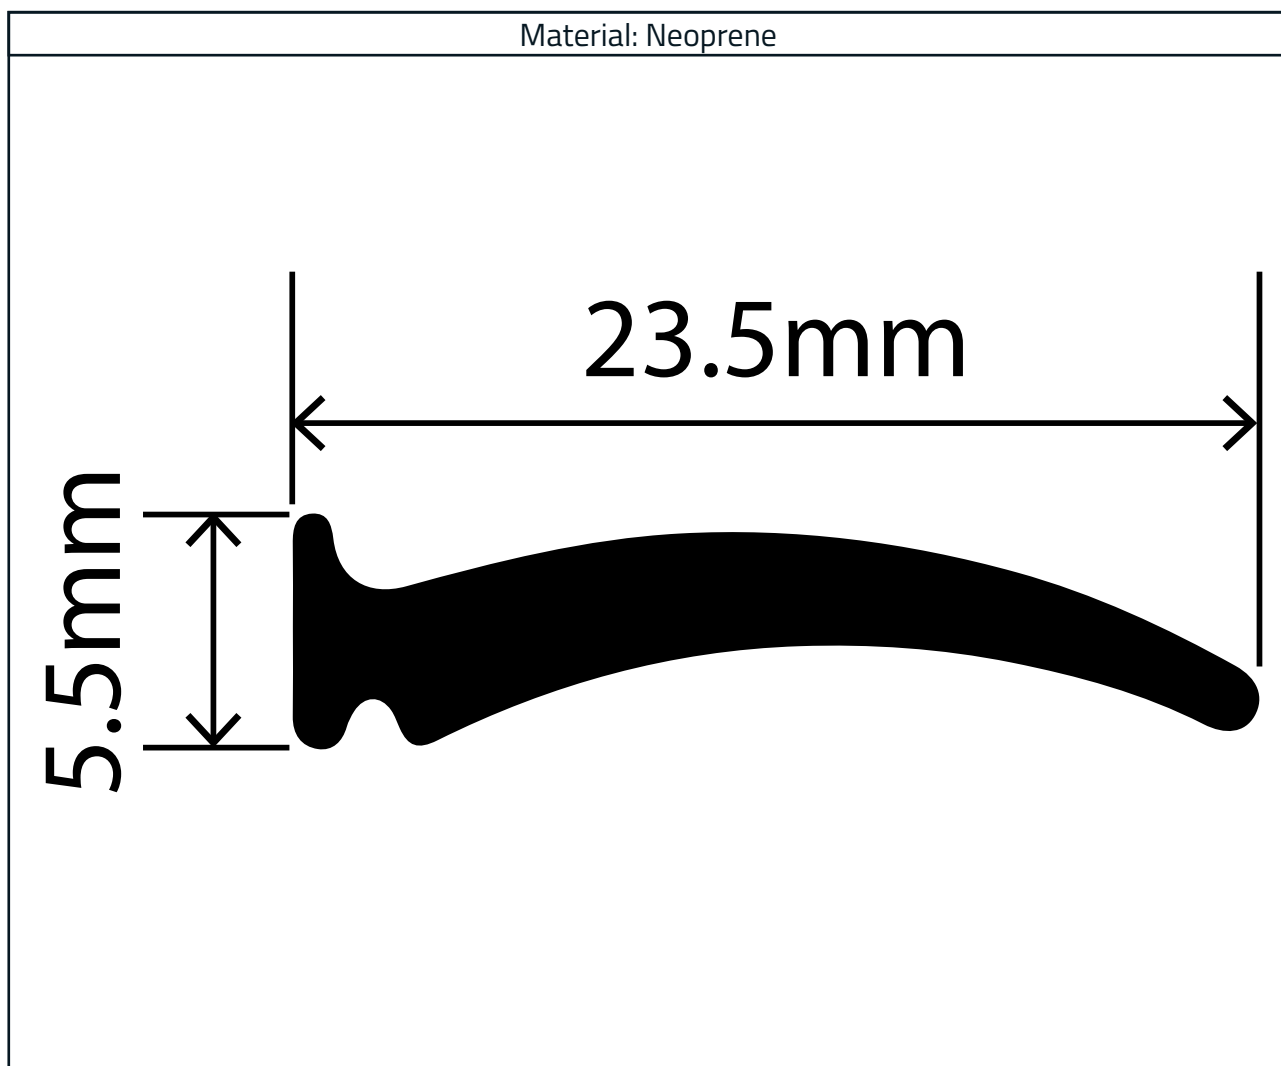

Measurements:

Width	Height
23.5mm	5.5mm

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

Technical Data

Property	Value
Hardness (Shore A)	75° ± 5°
Density (Specific Gravity)	1.28 g/cm ³ ± 0.02
Tensile Strength	>6 MPa
Elongation at Break	>250%
Compression Set (22hrs @ 70°C)	22.5%
Colour	Black
Max Continuous Length	30 metres
Weight	0.14kg
Heat Resistance (70hrs @ 70°C)	
Change in Shore Hardness	+5°
Change in Tensile Strength	±10%
Change in Elongation at Break	±15%
Resistance	
Ozone & Weathering Resistance	Fair
Dilute Acid & Bases	Fair

T-shaped black neoprene rubber strip, featuring side slots and wiper. Suitable for slots up to 6mm wide, with a blade length of around 20mm.

Used for sealing doors, windows, and various other areas within classic cars, buses, caravans, aircraft, trains, marine vessels, and other industries.



The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.