


# EPDM Lip Seal Profile 8mm x 24mm

Product Code: RCLS8X24W

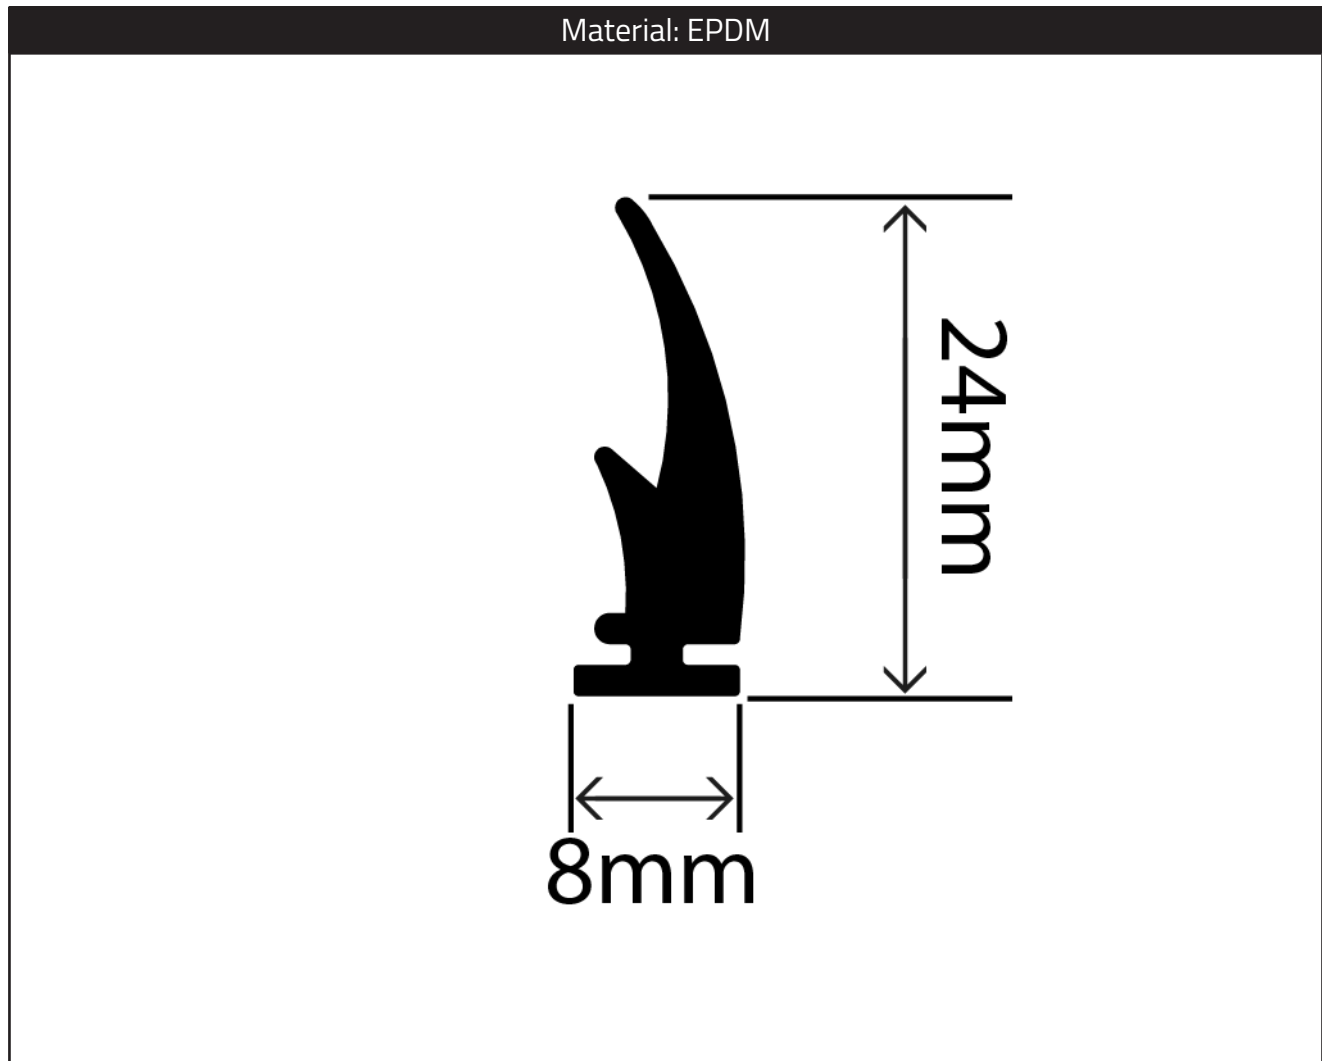

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.

## Technical Data

| Property                       | Test Method | Value                            |
|--------------------------------|-------------|----------------------------------|
| Compound                       | -           | Ethylene Propylene Diene Monomer |
| Hardness (IRHD)                | ISO 48      | 72° ± 5°                         |
| Hardness (Shore A)             | ISO 868     | 70° ± 5°                         |
| Density                        | ISO 1183    | 1.26 g/cm <sup>3</sup> ± 2       |
| Tensile Strength               | ISO 37      | 7.0 MPa (min)                    |
| Elongation at Break            | ISO 37      | 300 % (min)                      |
| Compression Set (24 h @ 70° C) | ISO 815     | 20 % (max)                       |
| Working Temperature Range      | -           | -40° C to +90° C                 |

The information contained on this product information sheet is to be used as guidance. The advice is given in good faith and does not constitute any guarantee or recommendation for suitability. The Rubber Company cannot be held liable for any damage caused by incorrect installation. We hereby reserve the right to change the technical information herewith without notification or prior agreement.